





5-year warranty



## **Technical data**

E.	ını	+ic	na	ı	ata

Value Cine	311 1101	
Valve Size	2" [50]	
Fluid	chilled or hot water, up to 60% glycol	
Fluid Temp Range (water)	0250°F [-18120°C]	
Body Pressure Rating	400 psi	
Close-off pressure Δps	200 psi	
Flow characteristic	equal percentage	
Servicing	maintenance-free	
Flow Pattern	2-way	
Leakage rate	0% for A – AB	
Controllable flow range	75°	
Cv	57	
No Characterized Disc	TRUE	
Cv Flow Rating	A-port: as stated in chart B-port: 70% of A – AB	
	Cv	
Maharaharaha	Mistral related burns hade.	
Valve body	Nickel-plated brass body	
Spindle	stainless steel	
Spindle seal	EPDM (lubricated)	

# Materials

Valve body	Nickel-plated brass body
Spindle	stainless steel
Spindle seal	EPDM (lubricated)
Seat	PTFE
Characterized disc	No Disc (full flow)
Pipe connection	NPT female ends
O-ring	EPDM (lubricated)
Ball	stainless steel
Non Spring	ARB(X)
Non-Spring	
Spring	AFRB(X)



Suitable actuators

• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

# **Product features**


Safety notes

## Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box reheat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.




## Flow/Mounting details

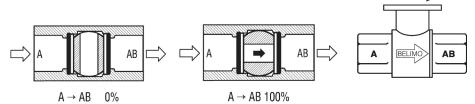


Two-way valves should be installed with the disc upstream.

# **Dimensions**

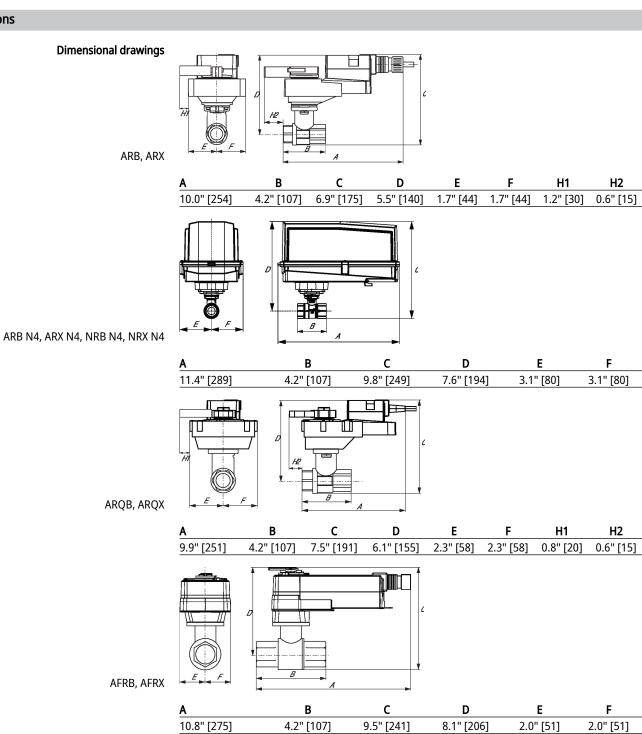



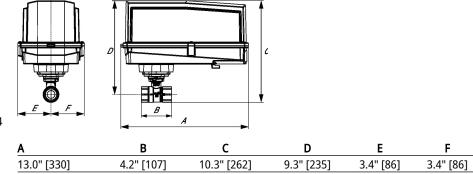

AFRB N4, AFRX N4



Modulating, Non-Spring Return, 24 V, for DC 2...10 V or 4...20 mA





ARX24-SR



Technical data		
Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Power consumption in operation	2.5 W
	Power consumption in rest position	0.4 W
	Transformer sizing	5 VA (class 2 power source)
	Electrical Connection	18 GA plenum cable with 1/2" conduit connector, degree of protection NEMA 2 / IP54, 3 ft [1 m] 10 ft [3 m] and 16ft [5 m]
	Overload Protection	electronic thoughout 090° rotation
Functional data	Operating range Y	210 V
	Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
	Input Impedance	100 k $\Omega$ for 210 V (0.1 mA), 500 $\Omega$ for 420 mA
	Position feedback U	210 V
	Position feedback U note	Max. 1 mA
	Direction of motion motor	selectable with switch 0/1
	Manual override	external push button
	Angle of rotation	90°
	Angle of rotation note	adjustable with mechanical stop
	Running Time (Motor)	default 90 s, variable 90 or 150 s
	Running time motor variable	90 or 150 s
	Noise level, motor	45 dB(A)
	Position indication	Mechanically, pluggable
Safety data	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU Listed to UL 2043 - suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Quality Standard	ISO 9001
	Ambient temperature	-22122°F [-3050°C]
	Storage temperature	-40176°F [-4080°C]
	A 1.5 (1) 1.10	M 050/ BH

Ambient humidity

Servicing

Max. 95% RH, non-condensing

maintenance-free



### **Accessories**

Electrical accessories	Description	Туре	
	Battery backup system, for non-spring return models	NSV24 US	
	Battery, 12 V, 1.2 Ah (two required)	NSV-BAT	

## **Electrical installation**

# **INSTALLATION NOTES**

A Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

Actuators may also be powered by DC 24 V.

6 Only connect common to negative (-) leg of control circuits.

 $\Lambda$  A 500  $\Omega$  resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.


Actuators with plenum cable do not have numbers; use color codes instead.

Meets cULus requirements without the need of an electrical ground connection.

# Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

## Wiring diagrams

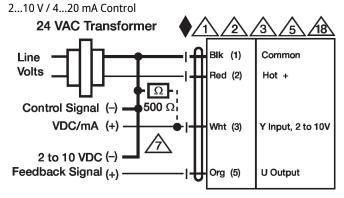

# **Dimensions**