







Power Supply 24 VAC ±20%, 50/60 Hz, 24 – 36 VDC Power Consumption Running 50/60 Hz, 24 VA Power Consumption Holding 6.5 VA, End stop 67 VA, 2.5 A slow blow fuse * Transformer Sizing 40 VA (class 2 power source) Shaft Diameter 1/2" to 1.05" round, centers on 1/2" an with insert, 1.05" without insert Electrical Connection 3ft [1m], 18 GA, 2 color coded leads Overload Protection electronic throughout 0° to 95° rotation Electrical Protection actuators are double insulated Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	/
Power Supply Power Consumption Running Fower Consumption Running Fower Consumption Holding Fower Consumption Fower Consumpti	
Power Consumption Running Fower Consumption Holding Fower Consumption Holding Fower Consumption Holding For Holding For Consumption Holding For Holding For Consumption Holding For Consumpt	
Power Consumption Holding 6.5 VA, End stop 67 VA, 2.5 A slow blow fuse * Transformer Sizing 40 VA (class 2 power source) Shaft Diameter 1/2" to 1.05" round, centers on 1/2" an with insert, 1.05" without insert Electrical Connection 3ft [1m], 18 GA, 2 color coded leads Overload Protection Electrical Protection Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	
fuse * Transformer Sizing 40 VA (class 2 power source) Shaft Diameter 1/2" to 1.05" round, centers on 1/2" an with insert, 1.05" without insert Electrical Connection 3ft [1m], 18 GA, 2 color coded leads Overload Protection electronic throughout 0° to 95° rotation Electrical Protection actuators are double insulated Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	V
Shaft Diameter 1/2" to 1.05" round, centers on 1/2" an with insert, 1.05" without insert Electrical Connection 3ft [1m], 18 GA, 2 color coded leads Overload Protection electronic throughout 0° to 95° rotation Electrical Protection actuators are double insulated Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	
with insert, 1.05" without insert Electrical Connection 3ft [1m], 18 GA, 2 color coded leads Overload Protection electronic throughout 0° to 95° rotation Electrical Protection actuators are double insulated Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	
Electrical Connection 3ft [1m], 18 GA, 2 color coded leads Overload Protection electronic throughout 0° to 95° rotation Electrical Protection actuators are double insulated Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	d 3/4"
Overload Protection electronic throughout 0° to 95° rotation Electrical Protection actuators are double insulated Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	
Electrical Protection actuators are double insulated Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	
Angle of Rotation 95° Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	1
Torque 70 in-lbs [8 Nm] minimum from 32°F to 350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	
350°F [0°C to 177°C] Direction of Rotation (Motor) reversible with CW/CCW mounting Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting	
Direction of Rotation (Fail-Safe) reversible with CW/CCW mounting)
Position Indication visual indicator, 0° to 95° (0° is full spi	ing
return position)	
Running Time (Motor) <15 sec at rated voltage and torque 32° 122°F [0°C to 50°C]	F to
Running Time (Fail-Safe) <15 sec	
Ambient Humidity 5 to 95% RH non-condensing	
Ambient Temperature Range 32°F to 122°F [0°C to 50°C]	
Storage Temperature Range -40°F to 176°F [-40°C to 80°C]	
Housing NEMA Type 1 / IP40	
Housing Material zinc coated steel	
Gears steel, permanently lubricated	
Agency Listings† cULus listed to UL873 and CAN/CSA C2	2.2
No.24, UL 2043 Listed for air plenum	
installation per NEC 300.22 and IMC Se	ction
602 NYC Department of Buildings MEA 197	07 1/1
California State Fire Marshal Listing 32	
1593:101.	10-
Noise Level (Motor) 45 dB (A) motor, 62 dB (A) spring, inau	dible
holding	
Servicing maintenance free	
Quality Standard ISO 9001	
Weight 6.6 lb [3 kg]	
Auxiliary Switch 2 x SPDT, 7A resistive, 2.5A inductive a or 250V, double insulated, one switch a one at 85°	

[†] UL File XAPX.E108966

Fire & Smoke damper actuator

Application


The type FSNF spring-return actuator is intended for the operation of smoke and combination fire and smoke dampers in ventilation and air-conditioning systems. The actuator will meet requirements of UL555 and UL555S when tested as an assembly with the damper and will meet requirements of UBC for 15 second opening and closing at 350°F. Square footage of damper operated will depend on make and model and the temperature required.

IMPORTANT 24VDC NOTE: The FSNF24 & -S models will not operate below 24VDC. A filtered and regulated power supply must be used.

Operation

Mounting of the actuator to the damper axle shaft or jackshaft (3/8" to 1.05") is via a cold-weld clamp. Teeth in the clamp and V-bolt dig into the metal of both solid and hollow shafts maintaining a perfect connection. The specially designed clamp will not crush hollow shafts. The bottom end of the actuator is held by an anti-rotation strap or by a stud provided by the damper manufacturer.

The actuator is mounted in its fail safe position with the damper blade(s) closed. Upon applying power, the actuator drives the damper to the open position. The internal spring is tensioned at the same time. If the power supply is interrupted, the spring moves the damper back to its fail-safe position.

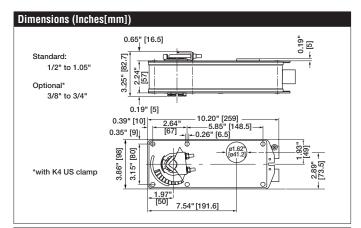

Safety Notes

Neither UL nor Belimo require local over-current protection. The FSNF actuators draw higher peak current when driving against any type of stop. If used, this requires the value of a local fuse or breaker to be increased to avoid nuisance opening or tripping. A 2.5 amp slow blow should be used for 24VAC. A 0.5 amp slow blow should be used for 120 VAC. A 0.25 amp slow blow should be used for 230V and a 0.3 amp slow blow for 208 VAC. Transformers: Note that while a 24V 100VA transformer would handle 2 actuators, a 4 A breaker or plug fuse is insufficient. A 5 amp slow blow would be required. Belimo Fire & Smoke actuators have passed the AMCA 520 and UL 555S Long Term Holding test. No special cycling is required during prolonged periods when actuator is driven open and held there. Periodic testing of dampers and actuators per local codes and NFPA 80 and NFPA 105 are required. The actuator contains no components which the user can replace or repair. A 1/2" threaded connector is standard. FSNFxx-FC models have a 3/8" Flex Connector. Other than the connector, these actuators are identical to the conduit connector version.



Accessories	
AF-P	Anti-rotation bracket AF/NF.
IND-AF2	Classic AF/NF position indicator.
K4-1 US	Classic AF/NF jackshaft clamp (up to 1.05").
KH-AF	Classic AF/NF crankarm for Shafts to 3/4".
KH-AF-1 US	Classic AF/NF crankarm for Jackshaft to 1.05".
SH8	Push rod for KG6 & KG8 ball joints (36" L, 5/16" diameter).
ZDB-AF2 US	Angle of rotation limiter for Classic AF/NF.
ZG-100	Univ. right angle bracket (17" H x 11-1/8" W x 6" base).
ZG-101	Univ. right angle bracket (13" H x 11" W x 7-7/16" base).
ZG-AF US	Classic AF/NF crankarm adaptor kit.
ZG-AF108	Classic AF/NF crankarm adaptor kit with ZG-108.
ZG-DC1	Damper clip for damper blade, 3.5" width.
ZG-DC2	Damper clip for damper blade, 6" width.
ZS-100	Weather shield - galvaneal (13" L x 8" W x 6" D).
ZS-150	Weather shield - PC w/ foam seal (16" L x 8-3/8" W x 4" D).
ZS-260	Explosion proof housing.
ZS-300	NEMA 4X, 304 stainless steel enclosure.
BAE165 US	165° F electric thermal sensor, SPST, normally closed.
S2A-F US	Auxiliary switch, 2x SPDT, 3A (0.5A inductive) @250 VAC max.

Typical Specification

All smoke and combination fire and smoke dampers shall be provided with Belimo FSTF, FSLF, FSNF, or FSAF actuators. All substitutions must be approved before submission of bid. Damper and actuator shall have UL 555S Listing for 250°F (350°F). Actuator shall have been tested to UL 2043 per requirements of IMC 602.2 and NEC 300.22 (c). Where position indication is required -S models with auxiliary switches or damper blade switches will be provided per code requirements.

Wiring Diagrams

> INSTALLATION NOTES



Provide overload protection and disconnect as required.



Actuators may be powered in parallel. Power consumption must be observed.



S4 makes to S6 when actuator is powered open.



Auxiliary switches are for end position indication or interlock control.




Double insulated.

Ground present on some models.



Meets cULus requirements without the need of an electrical ground connection.

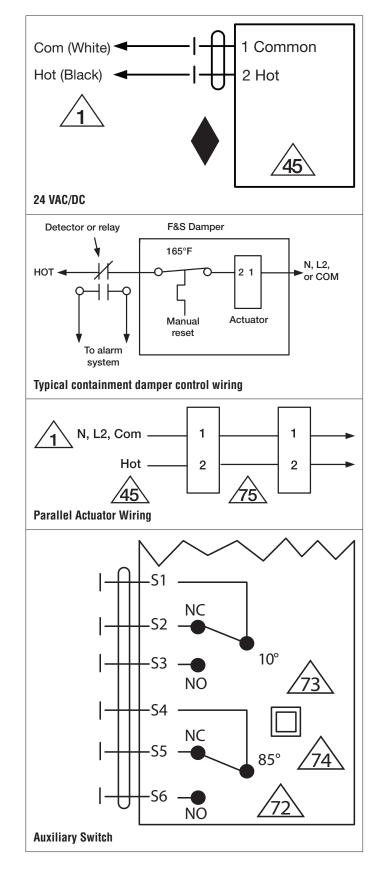

Date created, 10/14/2017 - Subject to change. © Belimo Aircontrols (USA), Inc.