



RH ROOM

Relative Humidity Room, Platinum RTD

The ACI Relative Humidity with Platinum RTD Room Series utilizes a thermoset polymer capacitive sensing element with a factory fitted hydrophobic filter to improve its moisture resistance. The sensing elements multilayer construction also provides excellent resistance in applications where dust, dirt, oils and common environmental chemicals are found. The RH room sensors include on board DIP switches which allow the user to select the desired output signal and can be powered by AC or DC power sources. Single point field calibration can be performed by using the increment and decrement calibration DIP switches to adjust your curve up or down in +/- 0.5% increments with each toggle of the corresponding switches. These enhancements provide increased flexibility and outstanding long-term reliability without the need to replace the sensors in the field. There are two enclosure options in this series which

should satisfy most commercial decors. Both enclosures feature four-way airflow to minimize self-heating. Three and Five-point NIST Calibration Certificates are available and must be ordered separately when placing your order.

Applications: Humidification, Dehumidification, Monitoring Indoor Space Humidity, Clean Rooms, Hospitals, Process Control, Laboratories, Museums, Schools, Office Buildings, Data Centers, ESD (Anti-Static) Control

The ACI RH Platinum RTDs Room is covered by ACI's Five (5) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, www.workaci.com.


PRODUCT SPECIFICATIONS

RH Supply Voltage (Reverse Polarity Protected):	4-20 mA: 250 Ohm Load: 15 - 40 VDC / 18 - 28 VAC 500 Ohm Load: 18 - 40 VDC / 18 - 28 VAC 0-5 VDC: 12 - 40 VDC / 18 - 28 VAC 0-10 VDC: 18 - 40 VDC / 18 - 28 VAC
RH Supply Current (VA):	Voltage Output: 8 mA maximum (0.32 VA) Current Output: 24 mA maximum (0.83 VA)
RH Output Load Resistance:	4-20 mA: 700 Ohms maximum 0-5 VDC or 0-10 VDC: 4K Ohms Minimum
RH Output Signal:	2-wire: 4 - 20 mA (Factory Default) 3-wire: 0-5 or 0-10 VDC and 4 - 20 mA (Field Selectable)
RH Accuracy @ 77°F (25°C):	+/- 1% over 20% RH Range between 20 to 90% +/- 2%, 3%, or 5% from 10 to 95%
RH Measurement Range:	0-100%
Operating RH Range:	0 to 95% RH, non-condensing
Operating Temperature Range:	35 to 122°F (1.5 to 60°C)
Storage Temperature Range:	-40 to 149°F (-40 to 65°C)
RH Stability Repeatability Sensitivity:	Less than 2% drift / 5 years 0.5% RH 0.1% RH
RH Response Time (T63):	20 Seconds Typical
RH Sensor Type:	Capacitive with Hydrophobic Filter
RH Transmitter Stabilization Time:	30 Minutes (Recommended time before doing accuracy verification)
RH Connections Wire Size:	Screw Terminal Blocks (Polarity Sensitive) 16 (1.31 mm ²) to 26 AWG (0.129 mm ²)
RH Terminal Block Torque Rating:	4.43 to 5.31 lb-in (0.5 to 0.6 Nm)
RH NIST Test Points:	Default Test Points: 3 Points (20%, 50% & 80%) or 5 Points (20%, 35%, 50%, 65% & 80%) 1% NIST Test Points: 5 Points within selected 20% Range (ie. 30%-50% are 30, 35, 40, 45 & 50)
Platinum RTD Output @ 32°F (0°C):	RHx-100-xW-R2 Series: 100 Ohms nominal RHx-1K-xW-R2 Series: 1000 Ohms nominal
Platinum RTD Tolerance Class:	+/-0.06% Class A Tolerance Formula: +/-°C = (0.15°C + (0.002 * t))
Platinum RTD Din Standard:	DIN EN 60751 (IEC 751)
Temperature Coefficient:	3850 ppm/°C
Platinum RTD Stability:	+/-0.03% after 1000 Hours @ 572°F (300°C)
Temperature Connections Wire Size:	Screw Terminal Blocks (Polarity Sensitive) 16 (1.31 mm ²) to 26 AWG (0.129 mm ²)
Temperature Terminal Block Torque Rating:	4.43 to 5.31 lb-in (0.5 to 0.6 Nm)
Enclosure Material (Color):	"-R2" Enclosure: ABS (White) "-R" Enclosure: ABS (Beige)
Enclosure Flammability Rating:	UL94-HB
Product Dimensions (L x W x D):	"-R2" Enclosure: 4.50" (114.3 mm) x 2.75" (69.85 mm) x 1.12" (28.45 mm) "-R" Enclosure: 4.50" (114.3 mm) x 2.75" (69.85 mm) x 1.12" (28.45 mm)
Product Weight:	A/RHx-xx-xW-R2 Series: 0.17 lbs. (0.077 kg) A/RHx-xx-xW-R Series: 0.17 lbs. (0.077 kg)
Agency Approvals:	CE, RoHS2, WEEE





DIMENSIONAL DRAWING

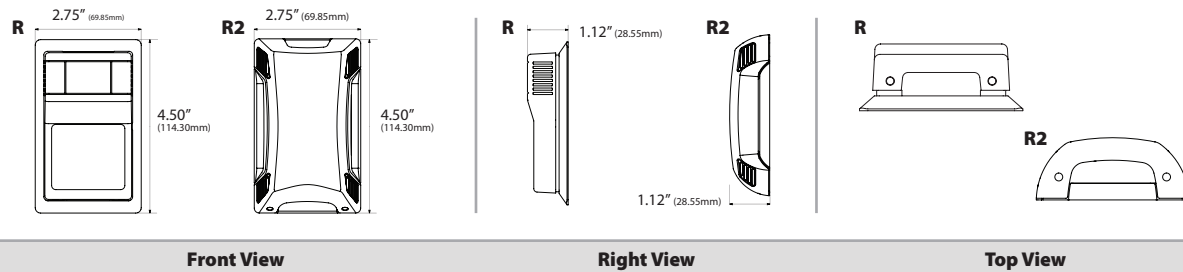

CUSTOM ORDERING

Model # Example: **A/** **RH2** **1K** **2W** **R5O** **010** **0 Ohms** **1K Ohms** **DA** **+ to -**
A. B. C. D. E. F. 1. 2. 3. 4.

MODEL #

A. Sensor Series <i>No Selection Required</i>	A/	A/
B. Accuracy <i>Select One (1)</i>	RH1 = +/--1% (Specify a 20% Range between 20 to 90% RH) RH2 = +/--2% RH3 = +/--3% RH5 = +/--5%	
C. Model Series <i>Select One (1)</i>	100 = 100 Ohm Platinum RTD 1K = 1K Ohm Platinum RTD	
D. Number of Wires <i>Select One (1)</i>	2W = Two Wires 3W = Three Wires	
E. Configuration <i>Select One (1)</i>	R = Room RO = Room with Override RS = Room with Setpoint R5O = Room with Setpoint and Override R2 = Room R2O = Room with Override R2S = Room with Setpoint R25O = Room with Setpoint and Override	
F. Output Signal <i>Select One (1)</i>	---- = 4 to 20 mA (Default) 010 = 0 to 10 VDC 05 = 0 to 5 VDC	
Setpoint Configuration Options <i>Select Options below if RS, R5O, R2S or R25O was selected as a Configuration (C)</i>		
1. Offset Resistor <i>Select One (1)</i>	0 Ohms 51.1 Ohms 499 Ohms 750 Ohms 806 Ohms 1K Ohms 2K Ohms 2.49K Ohms 4.75K Ohms 6.19K Ohms 7.87 Ohms 10K Ohms 20K Ohms	
2. Potentiometer <i>Select One (1)</i>	400 Ohm 1K Ohms 2K Ohms 5K Ohms 8.5K Ohms 10K Ohms 20K Ohms 100K Ohms	
3. Setpoint Direction <i>Select One (1)</i>	DA = Direct Acting (Bottom to Top (Smaller to Larger)) RA = Reverse Acting (Bottom to Top (Larger to Smaller))	
4. Setpoint Indication <i>Select One (1)</i>	+ to - Cool Warm 55 to 85F 10-30C (R Only) Blue Red (R2 Only)	

Note: Outputs are field selectable between 4-20 mA, 0-5 VDC & 0-10 VDC

ACCESSORIES ORDERING

Model # Example: **A/MOUNTING PLATE BEIGE R** **-OR-** **106821**

Model #	Item #	Description
A/MOUNTING PLATE BEIGE R	106821	Wall Mounting Back Plate, Plastic, Beige ("R")
A/MOUNTING PLATE WHITE R2	143369	Wall Mounting Back Plate, Plastic, White ("R2")
LOCKING COVER	107370	Clear Thermostat Guard, Locking Cover, Low Profile
A/ROOM-FOAM-PAD	125690	1/8" Foam Insulation Pad with Adhesive (3" x 2", Black)

ACCESSORIES ORDERING (NIST)

Model # Example: **NIST RH CERT**

Model #	Description
NIST RH CERT	RH Calibration Certificate (Specify 3 Point or 5 Point NIST)

Note: When ordering NIST certificates, please add an additional line item under the corresponding A/RHx-xx-R/R2 Model Number

