

RH WALL PLATE

Relative Humidity, Wall Plate, Thermistor

The ACI Relative Humidity with Thermistor Wall Plate Series utilizes a thermoset polymer capacitive sensing element with a factory applied hygroscopic filter to deliver a proportional analog voltage output signal. The hygroscopic filter provides added resistance to moisture, dust, and other chemicals for greater long term reliability. The RH Stainless Plate transmitter features integral DIP switches for field selection of the proper output signal and supply voltage to meet your applications requirements. Each unit also contains 0%, 50%, and 100% test options to verify that the transmitter is both working and properly installed. Field calibration can be

performed by using the increment and decrement calibration DIP switches without the need to replace the sensing element. These enhancements provide increased flexibility and outstanding long-term reliability. All RH Stainless Plate transmitters come standard with an attractive brushed finish stainless steel, single gang wall mounting plate and are designed to mount over a single gang junction box in the wall. The PCBs are conformally coated for added protection from moisture and other contaminants. A temporary plastic sensor cover is included to provide protection for the RH sensor from chemicals used in wash down applications. Three and Five-point NIST Calibration Certificates are available but they must be ordered separately when placing your order.


Applications: Pharmaceutical, Hospitals, Operating Rooms, Vivariums, Clean Rooms, Process Control, Wash Down Environments & Stability Chambers

The ACI RH Thermistor Wall Plate is covered by ACI's Five (5) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, www.workaci.com.

PRODUCT SPECIFICATIONS

RH Supply Voltage	0-5 VDC: 12 - 40 VDC / 18 - 28 VAC	
(Reverse Polarity Protected):	0-10 VDC: 18 - 40 VDC / 18 - 28 VAC	
RH Supply Current (VA):	8 mA maximum (0.32 VA)	
RH Output Load Resistance:	4K Ohms Minimum	
RH Output Signal:	3-wire: 0-5 or 0-10 VDC	
RH Accuracy @ 77°F (25°C):	+/- 2%, 3%, or 5% from 10 to 95%	
RH Measurement Range:	0-100%	
Operating RH Range:	0 to 95% RH, non-condensing (Conformally Coated PCB's)	
Operating Temperature Range:	-40 to 140°F (-40 to 60°C)	
Storage Temperature Range:	-40 to 149°F (-40 to 65°C)	
RH Stability Repeatability Sensitivity:	Less than 2% drift / 5 years 0.5% RH 0.1% RH	
RH Response Time (T63):	20 Seconds Typical	
RH Sensor Type:	Capacitive with Hydrophobic Filter	
RH Transmitter Stabilization Time:	30 Minutes (Recommended time before doing accuracy verification)	
RH Connections Wire Size:	Screw Terminal Blocks (Polarity Sensitive) 16 (1.31 mm ²) to 26 AWG (0.129 mm ²)	
RH Terminal Block Torque Rating:	4.43 to 5.31 lb-in (0.5 to 0.6 Nm)	
RH NIST Test Points:	Default Test Points: 3 Points (20%, 50% & 80%) or 5 Points (20%, 35%, 50%, 65% & 80%)	
Nominal Thermistor Resistive Output @ 77°F (25°C) (Lead Wire Colors), Non-Linear NTC (Negative Temperature Coefficient):	RHx-1.8K Series: 1.8KΩ (Red/Yellow)	RHx-CSI Series: 10KΩ (Green/Yellow)
	RHx-3K Series: 3KΩ (White/Brown)	RHx-10KS Series: 10KΩ (White/Blue)
	RHx-AN Series (Type III): 10KΩ (White/White)	RHx-10K-E1 Series: 10KΩ (Gray/Orange)
	RHx-AN-BC Series: 5.238KΩ (White/Yellow)	RHx-20K Series: 20KΩ (Brown/Blue)
	RHx-CP Series (Type II): 10KΩ (White/Green)	RHx-100KS Series: 100KΩ (Black/Yellow)
Thermistor Accuracy 32-158°F (0-70°C):	+/- 0.36°F (0.2°C) except 10K-E1 Series: +/- 0.54°F (0.3°C)	
Thermistor Power Dissipation Constant:	1.8K Series: +/- 0.9°F (0.5°C) @ 77°F (25°C) & +/- 1.8°F (1.0°C) from 32 to 158°F (0 to 70°C)	
Thermistor Sensor Response Time (T63):	3 mW/°C except 1.8K Series: 1 mW/°C; 10K-E1 Series: 2 mW/°C	
Thermistor Sensor Response Time (T63):	10 Seconds nominal	
Lead Wire Length Conductor Size:	14" (35.6 cm) 22 AWG (0.65 mm)	
Insulation Rating:	Etched Teflon (PTFE) Colored Leads Mil Spec 16878/4 Type E	
Wall Plate Material:	430 Stainless Steel (Brushed Stainless Steel Finish)	
Foam Material Foam Thickness:	Cross-linked LPDE (White) 0.25" (6.35 mm)	
Foam Flammability Rating:	FMVSS-302	
Sintered Filter Material:	304 Series Stainless Steel	
Product Dimensions (L x W x D):	4.51" (114.56 mm) x 2.76" (70.10 mm) x 1.25" (31.75 mm)	
Product Weight:	0.235 lbs. (0.107 kg)	
Agency Approvals:	CE, RoHS2, WEEE	



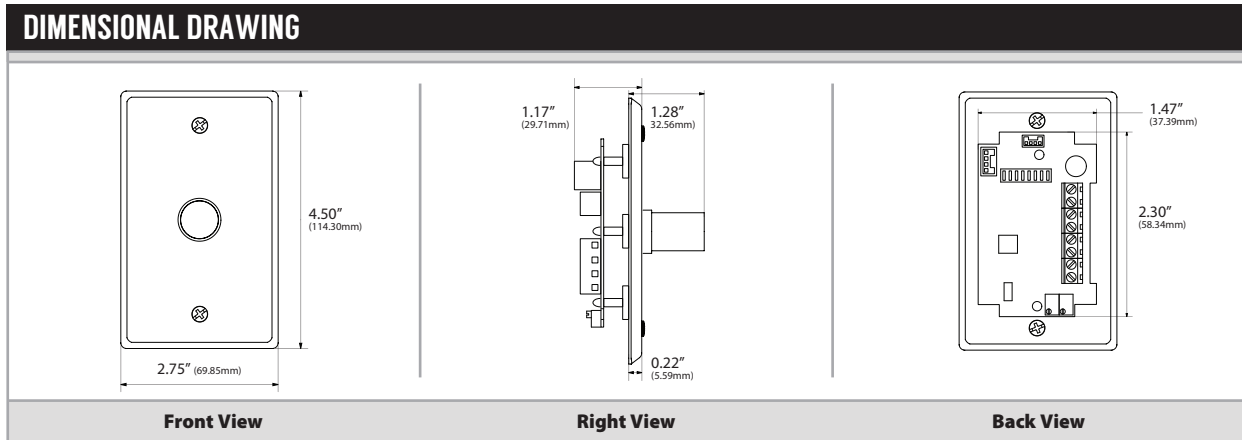

CUSTOM ORDERING		Model # Example: A/ RH2 1.8K SP 010 NIST	MODEL #
		A. B. C. D. E. F.	
A. Sensor Series <i>No Selection Required</i>	A/		A/
B. Accuracy <i>Select One (1)</i>	RH2 = +/-2% RH3 = +/-3% RH5 = +/-5%		
C. Temperature Sensor <i>Select One (1)</i>	1.8K 3K 10KS AN (Type III) AN-BC CP (Type II) CSI 10K-E1 20K 100KS		
D. Configuration <i>No Selection Required</i>	SP Stainless Wall Plate		SP
E. Output Signal <i>Select One (1)</i>	010 = 0 to 10 VDC 05 = 0 to 5 VDC		
F. NIST <i>Select One (1)</i>	---- = No NIST Certificate NIST = NIST Certificate (Must Specify 1, 3 or 5 Points)		

Note: Outputs are field selectable between 0-5 VDC & 0-10 VDC

ACCESSORIES ORDERING			Model # Example: A/SINTERED FILTER -OR- 143433
Model #	Item #	Description	
A/SINTERED FILTER	143433	3/8" Sintered Filter for RH Duct/Stainless Plate/Remote Probes	
A/1" VINYL PULL CAP	143462	1" EZ Vinyl Filter Cover for RH Stainless Plates & Remote Probes	

ACCESSORIES ORDERING (NIST)		Model # Example: NIST RH CERT
Model #	Description	
NIST RH CERT	RH Calibration Certificate (Specify 3 Point or 5 Point NIST)	

Note: When ordering NIST certificates, please add an additional line item under the corresponding A/RHx-xx-SP Model Number