





Type overview			
Туре			DN
B2050VSS-15			15
Technical data			
	Functional data	Valve size [mm]	0.5" [15]
		Fluid	chilled or hot water, up to 60% glycol, steam
		Fluid Tomp Dange (water)	22 2000 1400 1

Valve size [mm]	0.5" [15]
Fluid	chilled or hot water, up to 60% glycol, steam
Fluid Temp Range (water)	-22298°F [-30148°C]
Body Pressure Rating	2000 psig WOG
Close-off pressure ∆ps	1000 psi
Flow characteristic	modified equal percentage
Max Differential Pressure (Steam)	50 psi
Flow Pattern	2-way
Leakage rate	ANSI Class VI
Controllable flow range	90° rotation, A – AB open ccw, B – AB open cw
Cv	15
Maximum Inlet Pressure (Steam)	50 psi
Maximum Velocity	15 FPS
Valve body	Stainless steel A351-CF8M 316
Housing seal	PTFE
Spindle	316 stainless steel
Spindle seal	RPTFE
Seat	RPTFE

valve body	Statiliess steel /1551 Clowl 510
Housing seal	PTFE
Spindle	316 stainless steel
Spindle seal	RPTFE
Seat	RPTFE
Lock nut	stainless steel
Pipe connection	SAE NPT (female connections)
Ball	316 stainless steel
Non-Spring	LMB(X)

Suitable actuators Non-Spring LMB(X) GRCB(X) GRB(X)

Safety notes



Spring

Materials

• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

LF



Product features

Application

These threaded valves are designed to provide modulating or two position control of hot or chilled water and saturated steam systems under 50 psi.

Typical applications include reheat coils, VAV terminal control, unit ventilators, and air handlers, especially in areas which have minimum profile requirements.


Up to 50 psi steam

1/2" - 2000 PSIG WOG, Cold Non-Shock Federal Specification: WW-V-35C, Type II

Composition: SS


Style: 3

Flow/Mounting details



Dimensions

Туре	DN
B2050VSS-15	15

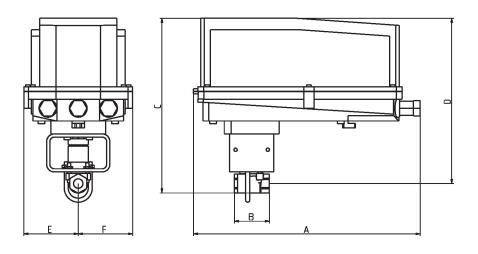

B2050VS..+GRC..N4

<u>A</u>	В	С	D	E	F
14.1" [358]	2.2" [56]	10.8" [274.5]	10.3" [262]	3.4" [86]	3.4" [86]



Technical data sheet

GRCX120-SR-T N4

Modulating, Non-Spring Return, AC 100...240 V, for DC 2...10 V or 4...20 mA







Technical d	lata
-------------	------

Electrical data	Nominal voltage	AC 100240 V	
	Nominal voltage frequency	50/60 Hz	
	Power consumption in operation	6 W	
	Power consumption in rest position	2 W	
	Electrical Connection	1/2" conduit connector, screw terminals	
	Overload Protection	electronic thoughout 090° rotation	
Functional data	Input Impedance	500 Ω	
	Position feedback U	210 V	
	Position feedback U note	Max. 0.5 mA	
	Direction of motion motor	selectable with switch 0/1	
	Manual override	under cover	
	Angle of rotation	90°	
	Angle of rotation note	adjustable with mechanical stop	
	Running Time (Motor)	35 s / 90°	
	Running time motor note	constant, independent of load	
	Noise level, motor	60 dB(A)	
	Position indication	Mechanically, 520 mm stroke	
Safety data	Degree of protection IEC/EN	IP66/67	
	Degree of protection NEMA/UL	NEMA 4X	
	Enclosure	UL Enclosure Type 4X	
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA	
		E60730-1:02, CE acc. to 2014/30/EU and	
	·	2014/35/EU	
	Quality Standard	ISO 9001	
	Ambient temperature	-22122°F [-3050°C]	
	Ambient temperature note	-4050°C for actuator with integrated heating	
	Storage temperature	-40176°F [-4080°C]	
	Ambient humidity	Max. 100% RH	
	Servicing	maintenance-free	
Materials	Housing material	Die cast aluminium and plastic casing	

Footnotes †Rated Impulse Voltage 4kV, Type of action 1, Control Pollution Degree 3.

Accessories

Factory add-on option only	Description	Туре
	Heater, with adjustable thermostat	N4 Heater Add-on
		24V (-H)
	Heater, with adjustable thermostat	N4 Heater Add-on
		230V (-Y)



Electrical installation

X INSTALLATION NOTES

A Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

Only connect common to negative (-) leg of control circuits.

 Λ A 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Actuators are provided with a numbered screw terminal strip instead of a cable.

Meets cULus requirements without the need of an electrical ground connection.

Marning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

2...10 V / 4...20 mA Control AC 100...240 V

