



5-year warranty



## Technical data

|                           |                          |                                                        |
|---------------------------|--------------------------|--------------------------------------------------------|
| <b>Functional data</b>    | Valve Size               | 2" [50]                                                |
|                           | Fluid                    | chilled or hot water, up to 60% glycol                 |
|                           | Fluid Temp Range (water) | 0...250°F [-18...120°C]                                |
|                           | Body Pressure Rating     | 400 psi                                                |
|                           | Close-off pressure Δps   | 200 psi                                                |
|                           | Flow characteristic      | equal percentage                                       |
|                           | Servicing                | maintenance-free                                       |
|                           | Flow Pattern             | 2-way                                                  |
|                           | Leakage rate             | 0% for A – AB                                          |
|                           | Controllable flow range  | 75°                                                    |
|                           | Cv                       | 120                                                    |
|                           | Cv Flow Rating           | A-port: as stated in chart B-port: 70% of A – AB<br>Cv |
| <b>Materials</b>          | Valve body               | Nickel-plated brass body                               |
|                           | Spindle                  | stainless steel                                        |
|                           | Spindle seal             | EPDM (lubricated)                                      |
|                           | Seat                     | PTFE                                                   |
|                           | Characterized disc       | stainless steel                                        |
|                           | Pipe connection          | NPT female ends                                        |
|                           | O-ring                   | EPDM (lubricated)                                      |
| <b>Suitable actuators</b> | Ball                     | stainless steel                                        |
|                           | Non-Spring               | ARB(X)                                                 |
|                           | Spring                   | AFRB(X)                                                |

## Safety notes




- **WARNING:** This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## Product features

**Application** This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.

## Flow/Mounting details


Two-way valves should be installed with the disc upstream.

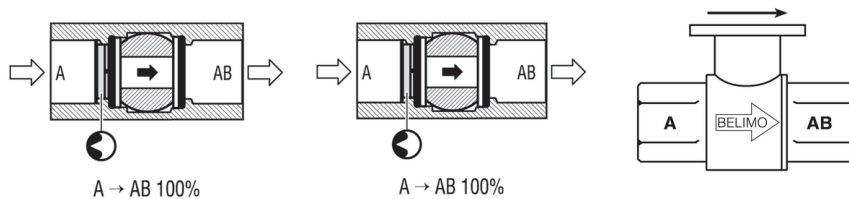

## Dimensions


## Dimensional drawings

ARB, ARX

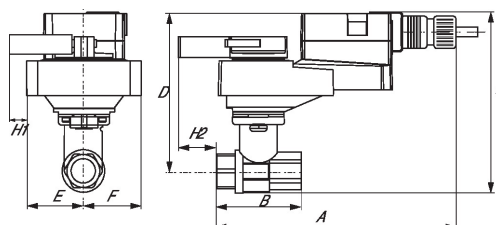


| A           | B          | C          | D          | E         | F         | H1        |
|-------------|------------|------------|------------|-----------|-----------|-----------|
| 11.3" [286] | 4.9" [125] | 7.7" [196] | 6.0" [152] | 1.7" [44] | 1.7" [44] | 1.2" [30] |

ARB N4, ARX N4, NRB N4, NRX N4

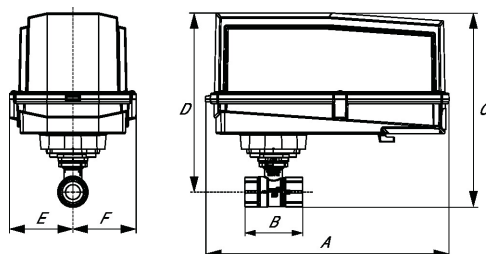


| A           | B          | C          | D          | E         | F         |
|-------------|------------|------------|------------|-----------|-----------|
| 11.4" [289] | 4.9" [125] | 9.8" [249] | 7.6" [194] | 3.1" [80] | 3.1" [80] |

ARQB, ARQX

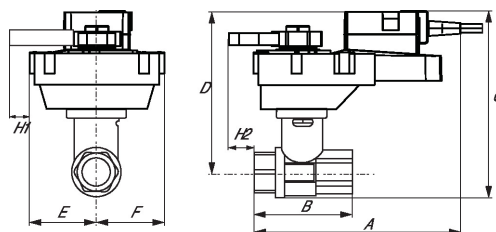


| A          | B          | C          | D          | E         | F         | H1        | H2        |
|------------|------------|------------|------------|-----------|-----------|-----------|-----------|
| 9.9" [251] | 4.9" [125] | 7.5" [191] | 6.1" [155] | 2.3" [58] | 2.3" [58] | 0.8" [20] | 0.6" [15] |

AFRB, AFRX

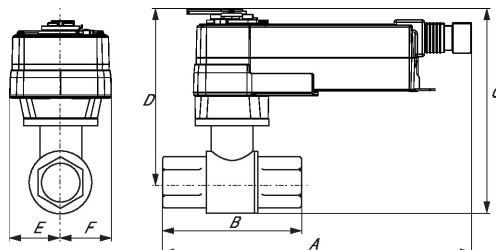

| A           | B          | C           | D          | E         | F         |
|-------------|------------|-------------|------------|-----------|-----------|
| 11.3" [286] | 4.9" [125] | 10.6" [268] | 8.9" [225] | 2.0" [51] | 2.0" [51] |

AFRB N4, AFRX N4

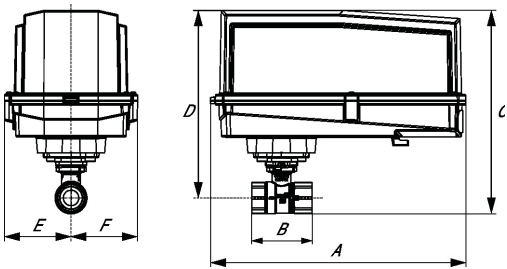

| A           | B          | C           | D          | E         | F         |
|-------------|------------|-------------|------------|-----------|-----------|
| 13.0" [330] | 4.9" [125] | 10.3" [262] | 9.3" [235] | 3.4" [86] | 3.4" [86] |



5-year warranty



## Technical data

|                        |                                     |                                                                                                                                                                                                              |
|------------------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Electrical data</b> | Nominal voltage                     | AC/DC 24 V                                                                                                                                                                                                   |
|                        | Nominal voltage frequency           | 50/60 Hz                                                                                                                                                                                                     |
|                        | Power consumption in operation      | 2.5 W                                                                                                                                                                                                        |
|                        | Power consumption in rest position  | 0.5 W                                                                                                                                                                                                        |
|                        | Transformer sizing                  | 5.5 VA (class 2 power source)                                                                                                                                                                                |
|                        | Auxiliary switch                    | 1 x SPDT, 3 A resistive (0.5 A inductive) @ AC 250 V, adjustable 0...100%                                                                                                                                    |
|                        | Switching capacity auxiliary switch | 3 A resistive (0.5 A inductive) @ AC 250 V                                                                                                                                                                   |
|                        | Electrical Connection               | 18 GA plenum cable with 1/2" conduit connector, degree of protection NEMA 2 / IP54, 3 ft [1 m] 10 ft [3 m] and 16ft [5 m]                                                                                    |
|                        | Overload Protection                 | electronic throughout 0...90° rotation                                                                                                                                                                       |
| <b>Functional data</b> | Direction of motion motor           | selectable with switch 0/1                                                                                                                                                                                   |
|                        | Manual override                     | external push button                                                                                                                                                                                         |
|                        | Angle of rotation                   | 90°                                                                                                                                                                                                          |
|                        | Angle of rotation note              | adjustable with mechanical stop                                                                                                                                                                              |
|                        | Running Time (Motor)                | default 90 s, variable 90 or 150 s                                                                                                                                                                           |
|                        | Running time motor variable         | 90 or 150 s                                                                                                                                                                                                  |
|                        | Noise level, motor                  | 45 dB(A)                                                                                                                                                                                                     |
|                        | Position indication                 | Mechanically, pluggable                                                                                                                                                                                      |
| <b>Safety data</b>     | Degree of protection IEC/EN         | IP54                                                                                                                                                                                                         |
|                        | Degree of protection NEMA/UL        | NEMA 2                                                                                                                                                                                                       |
|                        | Enclosure                           | UL Enclosure Type 2                                                                                                                                                                                          |
|                        | Agency Listing                      | cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU and 2014/35/EU; Listed to UL 2043 - suitable for use in air plenums per Section 300.22(c) of the NEC and Section 602.2 of the IMC |
|                        | Quality Standard                    | ISO 9001                                                                                                                                                                                                     |
|                        | Ambient temperature                 | -22...122°F [-30...50°C]                                                                                                                                                                                     |
|                        | Storage temperature                 | -40...176°F [-40...80°C]                                                                                                                                                                                     |
|                        | Ambient humidity                    | Max. 95% RH, non-condensing                                                                                                                                                                                  |
|                        | Servicing                           | maintenance-free                                                                                                                                                                                             |

## Accessories

| Electrical accessories | Description                                         | Type     |
|------------------------|-----------------------------------------------------|----------|
|                        | Battery backup system, for non-spring return models | NSV24 US |
|                        | Battery, 12 V, 1.2 Ah (two required)                | NSV-BAT  |

**Electrical installation**
**✂ INSTALLATION NOTES**


-  **1** Provide overload protection and disconnect as required.
-  **2** Actuators may be connected in parallel. Power consumption and input impedance must be observed.
-  **3** Actuators may also be powered by DC 24 V.
-  **6** Actuators Hot wire must be connected to the control board common. Only connect common to neg. (-) leg of control circuits. Terminal models (-T) have no-feedback.
-  **18** Actuators with plenum cable do not have numbers; use color codes instead.
-  **44** One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.
-  **!** Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.
-  **!** Meets cULus requirements without the need of an electrical ground connection.

** Warning! Live electrical components!**



During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

**Wiring diagrams**



On/Off

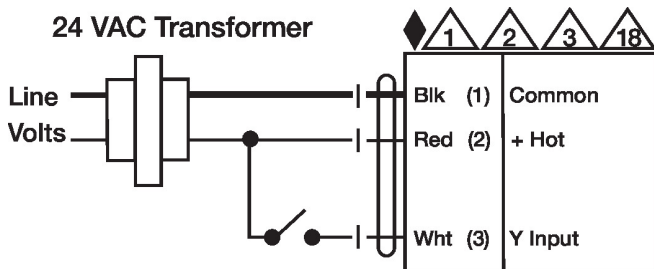

Floating Point

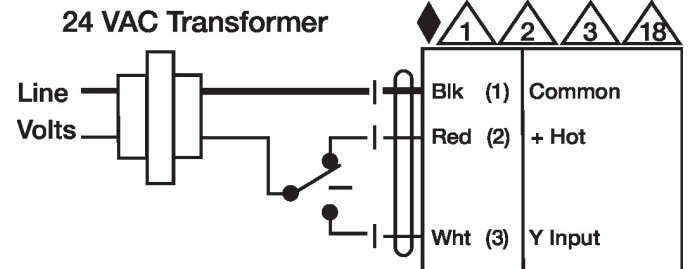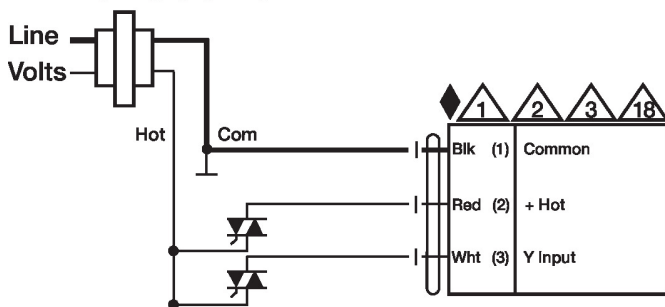
**24 VAC Transformer**


Floating Point - Triac Sink

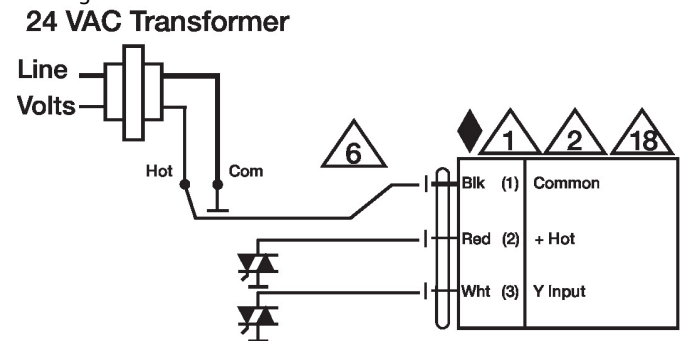
**Auxiliary Switches**

**Dimensions**