


## G315B-G, 3-Way, Globe Valve, Bronze Trim, Mixing/Diverting



### Technical Data

|                                   |   |
|-----------------------------------|---|
| Service                           | chilled, hot water, up to 60% glycol      |
| Flow Characteristic               | modified equal percentage, linear B to AB |
| Controllable Flow Range           | stem up - open B to AB                    |
| Size [mm]                         | 0.5" [15]                                 |
| End Fitting                       | NPT female ends                           |
| Body                              | bronze                                    |
| Stem                              | stainless steel                           |
| Stem Packing                      | EPDM O-ring                               |
| Seat                              | bronze                                    |
| Plug                              | brass                                     |
| Body Pressure Rating [psi]        | ANSI 250                                  |
| ANSI Class                        | ANSI 250 (up to 400 psi below 150°F)      |
| Media Temperature Range (Water)   | 20°F to 280°F [-7°C to 138°C]             |
| Max Differential Pressure (Water) | 35 psi (241 kPa)                          |
| Rangeability                      | A-port 100:1, B-port 50:1                 |
| Cv                                | 2.2                                       |
| Leakage                           | ANSI Class VI                             |
| Servicing                         | repack kits available                     |

### Flow Pattern

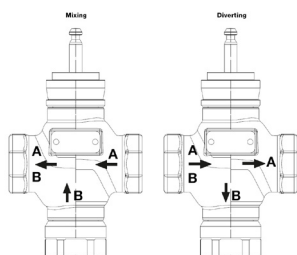


### Application

This valve is typically used in Air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in hydronic system with constant or variable flow. These 3-way valves can be used for both Mixing and Diverting depending on the piping configuration.

### Suitable Actuators

|         | Non-Spring | Spring | Electronic Fail-Safe |
|---------|------------|--------|----------------------|
| G315B-G | SVB(X)     | NFB(X) | SVKB(X)              |

### Dimensions (Inches [mm])

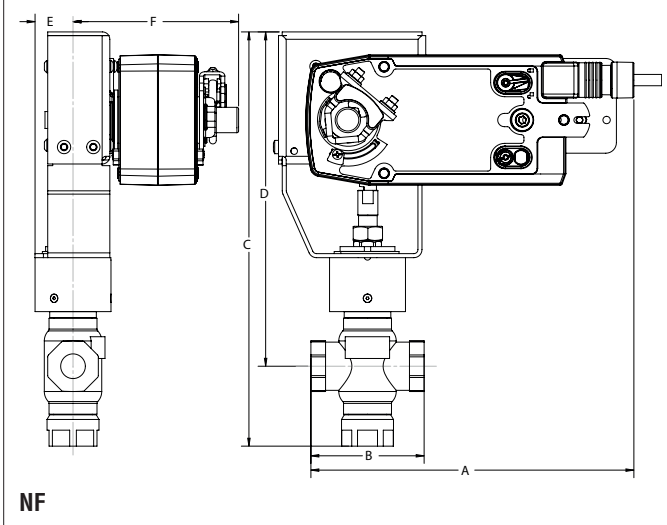


| A           | B         | C           | D           | E          | F           |
|-------------|-----------|-------------|-------------|------------|-------------|
| 9.61" [244] | 3.4" [86] | 12.2" [310] | 9.92" [252] | 1.18" [30] | 4.94" [125] |

### Piping


The valves should be mounted in a weather-protected area in a location that is within the ambient limits of the actuator. Allow sufficient room for valve with actuator and for service. The G2 and G3 preferred mounting position of the valve is with the valve stem vertical above the valve body, for maximum life. However, the assemblies can be mounted with the valve stem vertical or horizontal in relation to the pipe. The actuators should never be mounted underneath the valve, as condensation can build up and result in a failure of the actuators.



G315B-G, 3-Way, Globe Valve, Bronze Trim, Mixing/Diverting

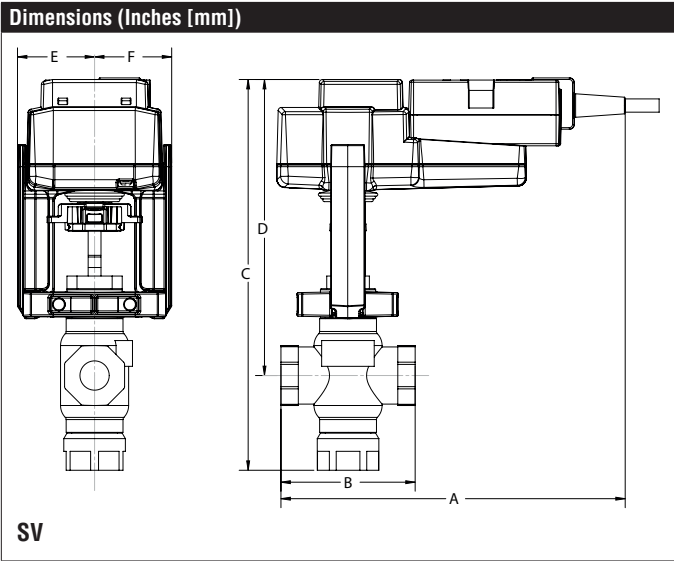

| A          | B         | C           | D           | E          | F |
|------------|-----------|-------------|-------------|------------|---|
| 8.6" [218] | 3.4" [86] | 9.74" [247] | 7.38" [188] | 1.93" [49] |   |

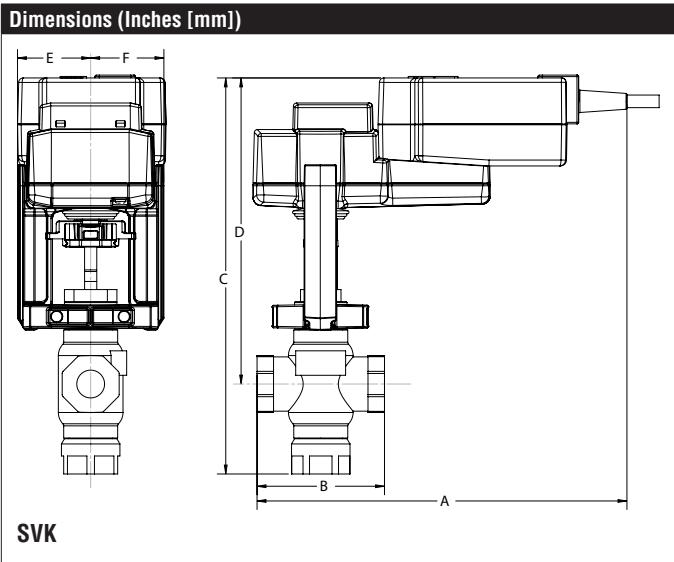


| A          | B         | C            | D           | E          | F |
|------------|-----------|--------------|-------------|------------|---|
| 9.7" [247] | 3.4" [86] | 10.35" [263] | 8.01" [203] | 1.93" [49] |   |

Date created, 12/19/2017 - Subject to change. © Belimo Aircontrols (USA), Inc.

## SVB24-3

On/Off, Floating Point, Non-Spring Return, Linear, 24 V

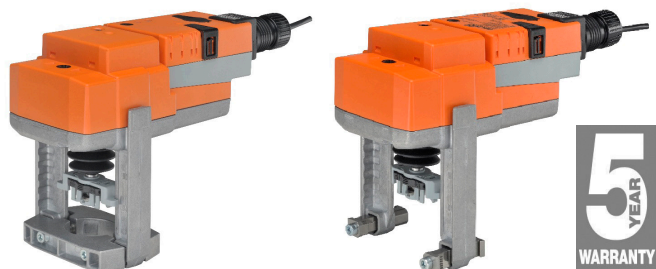

### Technical Data

|                                    |  |
|------------------------------------|--|
| Power Supply                       | 24 VAC, $\pm 20\%$ , 50/60 Hz, 24 VDC, $\pm 10\%$  |
| Power consumption in operation     | 2 W  |
| Power consumption in rest position | 1.5 W  |
| Transformer sizing                 | 3.5 VA (class 2 power source)  |
| Electrical Connection              | 3ft [1m], 18 GA plenum rated cable with 1/2" conduit connector protected NEMA 2 (IP54)     |
| Overload Protection                | electronic throughout full stroke  |
| Electrical Protection              | actuators are double insulated   |
| Input Impedance                    | 100 k $\Omega$ (0.1 mA), 500 $\Omega$ , 1000 $\Omega$ (on/off)                             |
| Position Feedback                  | No Feedback  |
| Stroke                             | 0.75" [19 mm]  |
| Actuating force motor              | 337 lbf [1500 N]   |
| direction of rotation motor        | reversible with switch   |
| Position indication                | stroke indicator on bracket  |
| Manual override                    | 4 mm hex crank (shipped w/actuator)  |
| Running time motor                 | 90 sec, constant, independent of load  |
| Ambient humidity                   | 5 to 95% RH non condensing (EN 60730-1)  |
| Ambient temperature                | -22...122 °F [-30...50 °C]   |
| Non-operating temperature          | -40...176 °F [-40...80 °C]   |
| Degree of Protection               | IP54, NEMA 2, UL Enclosure Type 2  |
| Housing material                   | Aluminum die cast and plastic casing   |
| Agency Listing                     | cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC and 2006/95/EC |
| Noise level, motor                 | <45 dB (A)   |
| Maintenance                        | maintenance free   |
| Quality Standard                   | ISO 9001   |
| Weight                             | 2.9 lb [1.3 kg]  |

† Use flexible metal conduit. Push the listed conduit fitting device over the actuator's cable to butt against the enclosure. Screw in conduit connector. Jacket the actuators input wiring with listed flexible conduit. Properly terminate the conduit in a suitable junction box. Rated impulse Voltage 800V. Type of action 1. Control pollution degree 3.

**Wiring Diagrams**
**INSTALLATION NOTES**

- 2 Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 18 Actuators with plenum cable do not have numbers; use color codes instead.
- Meets cULus requirements without the need of an electrical ground connection.


**WARNING! LIVE ELECTRICAL COMPONENTS!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

