

# LRB24-MFT

Modulating, Non-Spring Return, 24 V, Multi-Function Technology®



## Technical Data


|                               |                                                                                                           |
|-------------------------------|-----------------------------------------------------------------------------------------------------------|
| Power Supply                  | 24 VAC, $\pm 20\%$ , 50/60 Hz, 24 VDC, $\pm 10\%$                                                         |
| Power Consumption Running     | 2.5 W                                                                                                     |
| Power Consumption Holding     | 1.2 W                                                                                                     |
| Transformer Sizing            | 5 VA (class 2 power source)                                                                               |
| Electrical Connection         | 3ft [1m], 18 GA plenum cable with 1/2" conduit connector                                                  |
| Overload Protection           | electronic throughout 0° to 90° rotation                                                                  |
| Operating Range Y             | 2 to 10 VDC, 4 to 20 mA w/ ZG-R01 (500 $\Omega$ , 1/4 W resistor), variable (VDC, floating point, on/off) |
| Input Impedance               | 100 k $\Omega$ for 2 to 10 VDC (0.1 mA), 500 $\Omega$ for 4 to 20 mA, 1500 $\Omega$ for PWM and on/off    |
| Feedback Output U             | 2 to 10 VDC, 0.5 mA max, VDC variable                                                                     |
| Angle of Rotation             | 90°                                                                                                       |
| Direction of Rotation (Motor) | reversible with built-in switch                                                                           |
| Position Indication           | integrated into handle                                                                                    |
| Manual Override               | external push button                                                                                      |
| Running Time (Motor)          | 150 sec                                                                                                   |
| Ambient Temperature Range     | -22°F to 122°F [-30°C to 50°C]                                                                            |
| Storage Temperature Range     | -40°F to 176°F [-40°C to 80°C]                                                                            |
| Housing                       | NEMA 2, IP42, UL Enclosure Type 2                                                                         |
| Agency Listings†              | cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC                               |
| Noise Level (Motor)           | <35 dB (A)                                                                                                |
| Servicing                     | maintenance free                                                                                          |
| Quality Standard              | ISO 9001                                                                                                  |

†Rated Impulse Voltage 800V, Type action 1.B, Control Pollution Degree 3.

**Wiring Diagrams**
**INSTALLATION NOTES**

- 1 Provide overload protection and disconnect as required.
- 2 Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 5 Only connect common to negative (-) leg of control circuits.
- 7 A 500  $\Omega$  resistor (ZG-R01) converts the 4 to 20 mA control signal to 2 to 10 VDC.
- 8 Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 VAC line.
- 10 For triac sink the Common connection from the actuator must be connected to the Hot connection of the controller. Position feedback cannot be used with a triac sink controller; the actuator internal common reference is not compatible.
- 12 IN4004 or IN4007 diode. (IN4007 supplied, Belimo part number 40155).
- 18 Actuators with plenum cable do not have numbers; use color codes instead.
- Meets cULus requirements without the need of an electrical ground connection.

**WARNING! LIVE ELECTRICAL COMPONENTS!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

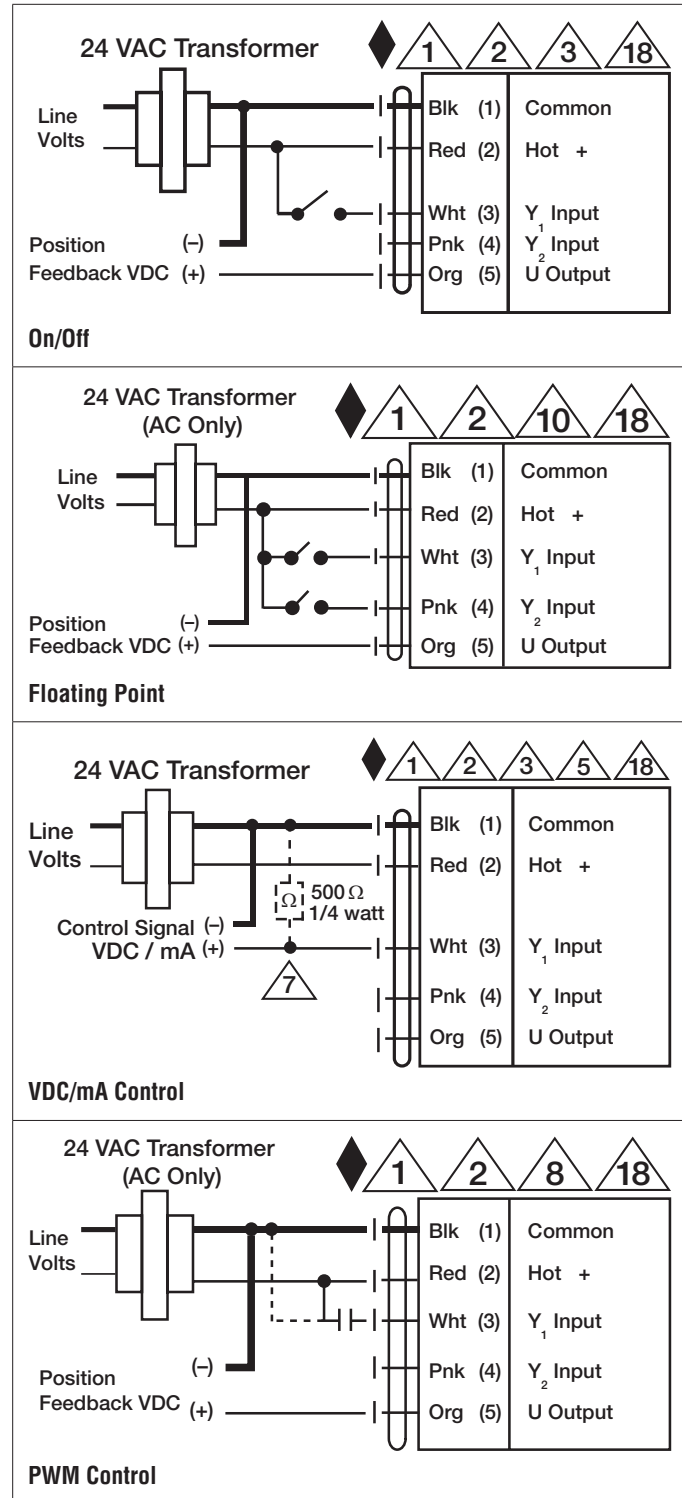

**LRB24-MFT**  
Modulating, Non-Spring Return, 24 V, Multi-Function Technology®

