

NMX24-3

On/Off, Floating Point, Non-Spring Return, 24 V



| Technical Data | |
|-------------------------------|--|
| Power Supply | 24 VAC, ±20%, 50/60 Hz, 24 VDC, ±10% |
| Power Consumption Running | 2 W |
| Power Consumption Holding | 0.2 W |
| Transformer Sizing | 4 VA (class 2 power source) |
| Shaft Diameter | 9/16" to 3/4" round |
| Electrical Connection | 695 |
| Overload Protection | electronic throughout 0° to 95° rotation |
| Input Impedance | 600 Ω |
| Angle of Rotation | Max. 95°, adjustable with mechanical stop |
| Torque motor | Min. 90 in-lbs [10 Nm] |
| Direction of Rotation (Motor) | reversible with built-in switch |
| Position Indication | reflective visual indicator (snap on) |
| Manual Override | external push button |
| Running Time (Motor) | 95 sec |
| Ambient Humidity | 5 to 95% RH non condensing (EN 60730-1) |
| Ambient Temperature Range | -22°F to 122°F [-30°C to 50°C] |
| Storage Temperature Range | -40°F to 176°F [-40°C to 80°C] |
| Housing | NEMA 2, IP54, UL Enclosure Type 2 |
| Housing Material | UL94-5VA |
| Agency Listings† | cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC and 2006/95/EC |
| Noise Level (Motor) | <45 dB (A) |
| Servicing | maintenance free |
| Quality Standard | ISO 9001 |
| Weight | 1.8 lb [0.8 kg] |

†Rated Impulse Voltage 800V, Type action 1, Control Pollution Degree 3.

Torque min. 90 in-lb, for control of damper surfaces up to 22 sq. ft.

Application

For on/off and floating point control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications.

The actuator is mounted directly to a damper shaft up to 1.05" in diameter by means of its universal clamp. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.


Operation

The actuator is not provided with and does not require any limit switches, but is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement.

The NMB(X) series provides 95° of rotation and a visual indicator indicates position of the actuator. When reaching the damper or actuator end position, the actuator automatically stops. The gears can be manually disengaged with a button on the actuator cover.

The NMB(X)24-3... actuators use a sensorless brushless DC motor, which is controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator's rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in holding mode.

Add-on auxiliary switches or feedback potentiometers are easily fastened directly onto the actuator body for signaling and switching functions.

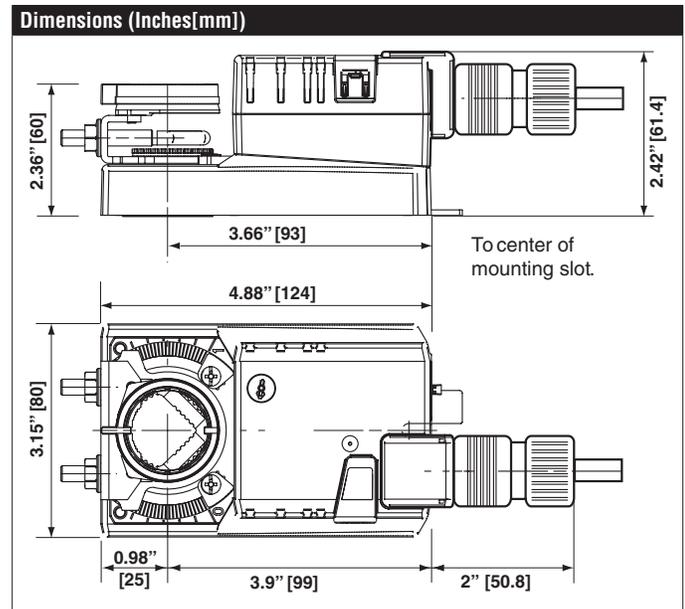

Date created, 11/29/2017 - Subject to change. © Belimo Aircontrols (USA), Inc.

| Accessories | |
|-------------|--|
| K-NA | Reversible NMB(X) Clamp (1/2" to 3/4"). |
| ZG-100 | Univ. right angle bracket (17" H x 11-1/8" W x 6" base). |
| ZG-101 | Univ. right angle bracket (13" H x 11" W x 7-7/16" base). |
| ZG-103 | Univ. right angle bracket (7-1/2" H x 11" W x 2-3/4" base). |
| ZG-104 | Univ. right angle bracket (13-5/8" H x 7-1/2" W x 4" base). |
| ZG-NMA | AMB(X), NMB(X), NKQB(X) crankarm adaptor kit. |
| AV8-25 | 9.8" shaft extension for 5/16" to 1" diameter shafts. |
| ZG-NMSA-1 | Shaft extension for 1/2" diameter shafts (3.8" L). |
| ZS-T | Terminal-strip cover for NEMA 2 rating (-T models). |
| ZS-100 | Weather shield - galvaneal (13" L x 8" W x 6" D). |
| ZS-150 | Weather shield - PC w/ foam seal (16" L x 8-3/8" W x 4" D). |
| TOOL-06 | 8 mm and 10 mm wrench. |
| S1A | Auxiliary switch, 1x SPDT, 3A (0.5A inductive) @250 VAC max. |
| S2A | Auxiliary switch, 2x SPDT, 3A (0.5A inductive) @250 VAC max. |
| P370 | Shaft mount auxiliary switch, 1/2" shaft. |
| P10000A GR | Feedback potentiometer 10000Ω. |
| P1000A GR | Feedback potentiometer 1000Ω. |
| P140A GR | Feedback potentiometer 140Ω. |
| P2800A GR | Feedback potentiometer 2800Ω. |
| P5000A GR | Feedback potentiometer 5000Ω. |
| P500A GR | Feedback potentiometer 500Ω. |

Typical Specification

Floating point, on/off control damper actuators shall be electronic direct-coupled type, which require no crank arm and linkage and be capable of direct mounting to a shaft up to 1.05" diameter. Actuators shall have brushless DC motor technology and be protected from overload at all angles of rotation. Actuators shall have reversing switch and manual override on the cover. If required, actuators will be provided with a screw terminal strip for electrical connections (NMX24-3-T). Run time shall be constant and independent of torque. Actuators shall be cULus listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

Wiring Diagrams

- (A) Actuators with appliance cables are numbered.
- 1 Provide overload protection and disconnect as required.
- 3 Actuators may also be powered by 24 VDC.
- 6 Actuators Hot wire must be connected to the control board common. Only connect common to neg. (-) leg of control circuits. Terminal models (-T) have no-feedback.
- 11 Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

