

# ECLYPSE™ APEX

Powerful ECLYPSE controller  
with advanced IoT and AI  
capabilities



ECLYPSE™

## Overview

The ECLYPSE APEX is a powerful IoT Edge controller that offers enhanced performance and dedicated spaces to IoT and AI developers. It facilitates HVAC system maintenance, increases efficiency of equipment and optimizes energy consumption by leveraging the latest available technology on site.

## Features & Benefits

- Powerful controller with two Ethernet ports (1Gbps each), additional processing power, and large data trending capacity to handle the growing needs of intelligent buildings.
- ECLYPSE Series input/output and communication modules are supported, providing competitive I/O combinations, and supporting up to 320 I/O points (up to 20 I/O modules).
- Secure boot and additional physical security measures designed to help overcome today's security challenges.
- Different communication protocols such as BACnet MS/TP, Modbus RTU, Modbus TCP, and M-Bus are supported to ensure ease of communication, authentication, and error detection.
- Embedded RESTful API to exchange data from different applications, such as energy dashboards, analytics tools, and mobile applications, while on premises or from the cloud with the IoT Hub connector.

### Developer Tools:

- Available Docker container and Azure IoT Edge technologies extend gateway features at the edge and allow IoT/AI third-party developers to embed advanced processing functionalities.
- On-board TPU (Tensor Processing Unit) accelerator, designed to run AI at the edge, adds intelligence to any building and opens the door to new control applications.

# Model Selection

Example: ECY-APEX

Series	License Points Limit
ECY-APEX	No Limits (320 I/O points, 96 Modbus devices)

## Accessories

ECLYPSE Wi-Fi Adapter	Wi-Fi Adapter for ECLYPSE Connected Controllers.
ECLYPSE Open-To-Wireless™ Adapter	EnOcean communication protocol adapter for ECLYPSE Connected Controllers.
ECLYPSE HD15 Cable	6ft (1.8m) cable for multiple-row panel installations. An HD15 cable must always be followed by a power supply module. For more information, refer to the Hardware Installation Guide.
ECx-Subnet-Adapter	Required for daisy-chaining the ECx-Display or the EC-Multi-Sensor with other subnet devices

# Product Specifications

## Power Supply Input (24VAC)

Input Voltage Range	24VAC; ±15%; Class 2
Power Consumption	75VA maximum; internal and external loads included
Recommended Transformer Size	100VA
Frequency Range	50 to 60Hz
Power factor	>90%

## Power Supply Input (24VDC)

Input Voltage Range	24VDC; ±15%; Class 2
Power Consumption	75W maximum; internal and external loads included
Minimum Power Supply Size	60W
Startup Inrush Current	4A for 50ms

## Current Limits

Power Supply Input	4A (internal fuse)
I/O Modules	1000mA (18.8W)
Subnet	450mA (8.5W)
USB 3.0	900mA per port
USB 2.0	500mA per port

## Communications

Ethernet Connection Speed	10/100/1000 Mbps
Addressing	IPv4 or Hostname
BACnet Profile	BACnet Building Controller (B-BC), AMEV AS-A and AS-B
BACnet Listing	BTL, WSP B-BC (pending)
BACnet Interconnectivity	BBMD forwarding capabilities BACnet MS/TP to BACnet/IP routing
BACnet Transport Layer	IP & MS/TP
BACnet MS/TP or Modbus RTU	1x RS-485 serial communications port
Web Server Protocol	HTML5
Web Server Application Interface	REST API
RS-485 Wiring	1 pair + common/shield
RS-485 EOL and Bias Resistor	Slide switch selectable
RS-485 Baud Rates	9600, 19 200, 38 400, or 76 800 bps
Modbus TCP	Devices must be on the same subnet

Wireless Adapter	Optional, USB Port Connection
Wi-Fi Communication Protocol	IEEE 802.11b/g/n
Wi-Fi Network Types	Client, Access Point, Hotspot
Ethernet Port Configuration	Switch

## Subnetwork

Maximum number of standard room devices supported per controller combined <sup>1</sup>	12
Allure EC-Smart-View Series <sup>2</sup>	12
Allure EC-Smart-Comfort Series	6
Allure EC-Smart-Air Series <sup>2</sup>	6
EC-Multi Sensor	4
ECx-Light-4 / ECx-Light-4D / ECx-Light-DALI	4
ECx-Blind-4 / ECx-Blind-4LV	4
Maximum number of Bluetooth low energy room devices per controller combined <sup>3</sup>	6
Allure UNITOUCH™	2
EC-Multi-Sensor-BLE	4

- For more details about supported quantities, see the ECLYPSE Selection Tool.xlsx spreadsheet file available for download on the Documentation and Resources Portal.
- A controller can support a maximum of 2 Allure sensor models equipped with a CO<sub>2</sub> sensor. Any remaining connected sensors must be without a CO<sub>2</sub> sensor.
- A mixed architecture with standard room devices and Bluetooth low energy enabled devices is not recommended.

## Hardware

Microprocessor	Quad core 1.6 GHz ARM Cortex A53 64 bit
Memory	2GB RAM 32GB Flash (20GB usable)
Real Time Clock (RTC)	Real Time Clock with rechargeable battery Supports SNTP network time synchronization
RTC Battery	20 hours charge time, 20 days discharge time Up to 500 charge / discharge cycles
Ethernet	2x RJ-45 Ethernet ports (10/100/1000 Mbps)
USB Connections	2x USB 3.0 Type-A Ports; 900mA per port

	1x USB 2.0 Type-C; Dual role data, 500mA per port
Intrusion Input	Digital (dry contact) – for future use only
AI Coprocessor	Google Edge TPU ML Accelerator
	4 TOPS (int8); 2 TOPS per watt (tera-operations per second)
Subnet	1x RJ-45 connector for subnet bus
Green LED	Power status, Subnet TX, RS-485 TX, and Ethernet Traffic/Speed
Orange LED	Controller status, Alarm, Subnet RX, RS-485 RX, and Ethernet Speed

### Open-to-Wireless Adapter

Communication Protocol	EnOcean wireless standard <sup>1</sup>
Connector Type	USB
Number of Wireless Inputs	Unlimited <sup>2</sup>



1. Available when an optional external ECLYPSE Open-to-Wireless Adapter is connected to the controller. Refer to the Open-to-Wireless Application Guide for a list of supported EnOcean wireless modules.
2. Wireless inputs will only be limited by physical distance between the EnOcean devices and the ECLYPSE Open-to-Wireless Adapter.

### Mechanical

Dimensions (H × W × D)	5.54 × 8.52 × 2.30" (216.42 × 140.29 × 58.54mm)
Shipping Weight	1.8lbs (0.82kg)
Mounting	DIN rail or screw mounting
Enclosure Material	Flame retardant/Poly-carbonate (FR/PC)
Enclosure Rating <sup>1</sup>	Plastic housing, UL94-5VB flammability rating


1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

### Environmental

Operating Temperature	32 to 122°F (0 to 50°C)
Storage Temperature	-22 to 158°F (-30 to 70°C),
Relative Humidity	0 to 90% non-condensing
Ingress Protection Rating	IP20
Nema Rating	1

### Standards and Regulations

CE Emission	EN61000-6-3: 2007+A1:2011
CE Immunity	EN61000-6-1: 2007
IEC	IEC 63044-5-1 (2017) IEC 63044-5-2 (2017)
FCC	Compliance with FCC rules part 15, subpart B, class B
ICES Compliance	ICES-003
UL Listed (CDN & US)	UL916 Energy management equipment

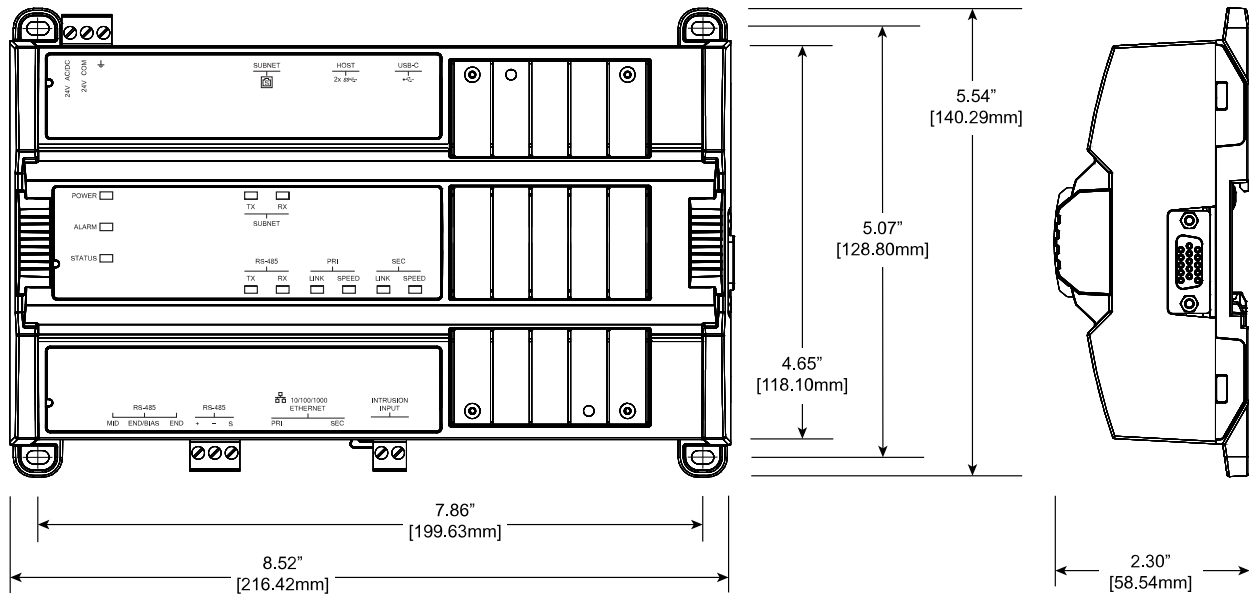

Specifications subject to change without notice.

ECLYPSE, Distech Controls, the Distech Controls logo, EC-Net, Allure, and Allure UNITOUCH are trademarks of Distech Controls Inc. BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association. The Bluetooth™ word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. All other trademarks are property of their respective owners.

©, Distech Controls Inc., All rights reserved.

Global Head Office - 4205 place de Java, Brossard, QC, Canada, J4Y 0C4 - EU Head Office - ZAC de Sacuny, 558 avenue Marcel Mérioux, 69530 Brignais, France