



# ECL-103

LONMARK® Certified 10-Point Programmable Controller



## Overview

The ECL-103 is a microprocessor-based programmable controller designed to control terminal units such as fan coil units, heat pump units, unit ventilators, and chilled ceilings. This controller uses the LonTalk® communication protocol and is LONMARK certified as an SCC Generic device, guaranteeing compatibility and interoperability with other manufacturers' LonMark certified controllers.



## Applications

These controllers meet the requirements of the following applications:

- Fan Coil Units
- Heat Pumps
- Unit Ventilators
- Chilled Ceilings

## Features & Benefits

### Flexible Inputs and Outputs

This controller has various input types including resistance, voltage, and digital-based ones. Moreover, it provides digital, floating, pulse width modulation, and proportional control outputs for valves, heating elements, fans, and lighting applications. This controller covers all industry-standard HVAC unitary applications.

### Highly Accurate Universal Inputs


Highly accurate universal inputs support thermistors and resistance temperature detectors (RTDs) that range from 0 Ohms to 350,000 Ohms, as well as support for inputs requiring 0 to 10VDC or 0 to 20mA with an external resistor. This provides the freedom of using your preferred or engineer-specified sensors, in addition to any existing ones.

### Rugged Inputs/Outputs

Rugged hardware inputs and outputs eliminate need for external protection components, such as diodes for 12V DC relays.

## Programmability

Supports Distech Controls' EC-*gfx*Program, which makes Building Automation System (BAS) programming effortless, by allowing you to visually assemble building blocks to create a custom control sequence for any HVAC, lighting, or building automation application.

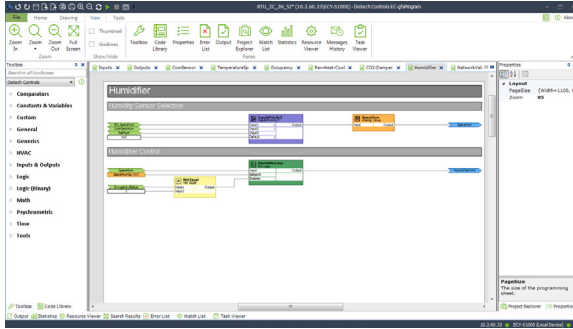

- Allure EC-Smart-Vue sensors feature a backlit-display and graphical menus that provide precise environmental zone control, with any combination of the following: temperature, humidity, CO<sub>2</sub>, and motion sensor.
- Allure EC-Smart-Comfort sensors feature colored LED indicators to provide user feedback, rotary knobs to adjust the setpoint offset and fan speed, and an occupancy override push button. This sensor can also be expanded with a combination of up to 4 add-on push button modules for lighting and shade/ sunblind control.
- Allure EC-Smart-Air sensors combine precise environmental sensing in a discreet and alluring enclosure for temperature, humidity, and CO<sub>2</sub>.

## Increased Energy Efficiency

Improves energy efficiency when combined with:

- Motion detectors to automatically adjust a zone's occupancy mode from standby to occupied when presence is detected
- CO<sub>2</sub> sensors as part of a demand-controlled ventilation strategy that adjusts the amount of fresh air intake according to the number of building occupants
- Light switches to control both lighting and a room's HVAC occupancy / standby mode setting



## Open-to-Wireless™ Solution



The controllers are Open-to-Wireless™ ready, and when paired with the Wireless Receiver, work with a variety of wireless battery-less sensors and switches, to reduce the cost of installation and minimize the impact on existing partition walls. For supported frequencies in your area, refer to the [Open-to-Wireless Solution Guide](#).

Available with an optional Wireless Receiver that supports up to 18 wireless inputs to create wire-free installations.

## Allure™ Series Communicating Sensor Support

These controllers work with a wide range of sensors, such as the Allure Series Communicating Sensors that are designed to provide intelligent sensing and control devices for increased user experience and energy efficiency.

## Model Selection

Model	ECL-103
Points	10-Point Controller
Universal hardware inputs	4
Wireless inputs <sup>1</sup>	18
15 Vdc Power Supply	■
Digital (triac) outputs	4
Universal outputs	2

1. All controllers are Open-to-Wireless ready. Available when an optional Wireless Receiver is connected to the controller. Some wireless sensors may use more than one wireless input from the controller.

## Recommended Applications










Model	ECL-103
2 Pipe Fan Coil	■
2 Pipe Fan Coil with Changeover Sensor	■
4 Pipe Fan Coil	■
Heat Pump Unit	■
Unit Ventilator	■
Chilled Ceiling	■

## Objects List

Objects List	
Calendar Objects	1
<input type="checkbox"/> Special events per calendar	25
Schedule Objects	2
<input type="checkbox"/> Special events per schedule	5
PID Loop Objects	8
Constants:	
<input type="checkbox"/> Boolean	124
<input type="checkbox"/> Enumeration	62
<input type="checkbox"/> Numeric	56
Variables:	
<input type="checkbox"/> Boolean	124
<input type="checkbox"/> Enumeration	54
<input type="checkbox"/> Numeric	56
nciSetpoint	■
Total Network Variables	170
Network Variable Input (General Usage):	
<input type="checkbox"/> NVI Changeable Type, Up to 31 Bytes <sup>1</sup>	50
Network Variable Output (General Usage):	
<input type="checkbox"/> NVO Changeable Type, Up to 31 Bytes	50
Hardware Input Network Variable:	
<input type="checkbox"/> nvoHwInput per Hardware Input	■
Hardware Output Network Variable:	
<input type="checkbox"/> nviHwInput per Hardware Output	■
<input type="checkbox"/> nvoHwInput per Hardware Output	■

1. Any type of Fan-In function is supported in combination with the "FOR" loop function.

# Functional Profile

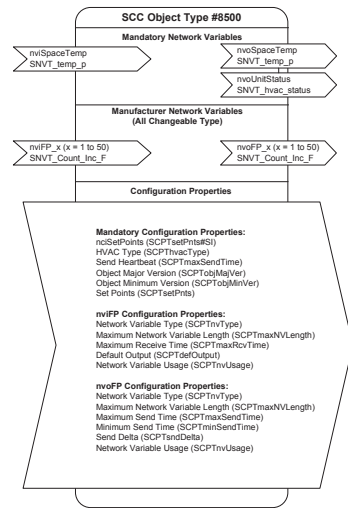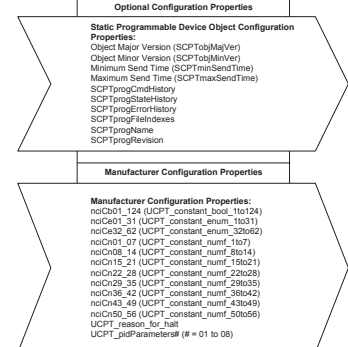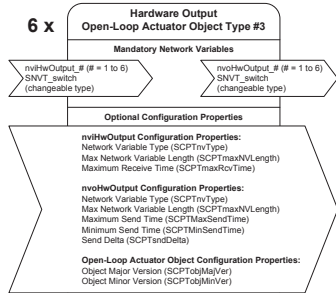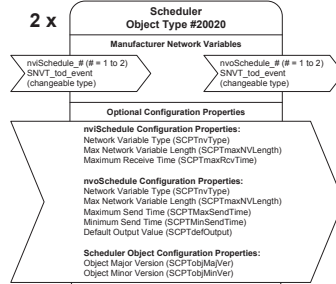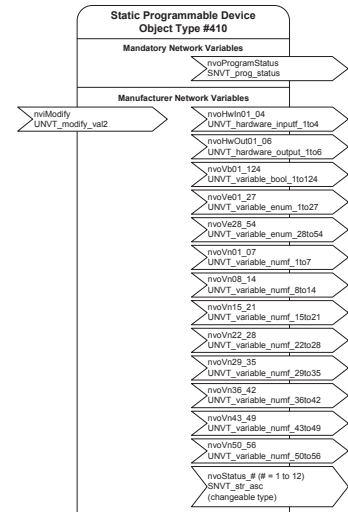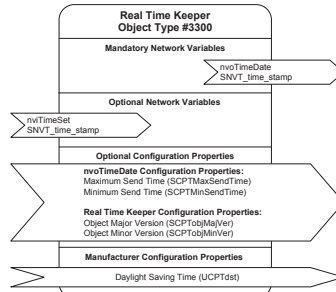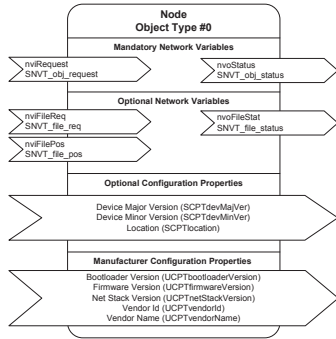

# Product Specifications

## Power Supply Input

Voltage Range \_\_\_\_\_ 24VAC/DC;  $\pm 15\%$ ; Class 2

Frequency Range \_\_\_\_\_ 50/60Hz

Overcurrent Protection \_\_\_\_\_ Field replaceable fuse

Fuse Type \_\_\_\_\_ 2.0A

\_\_\_\_\_ 3.0A (for triacs when using the internal power supply)

Power Consumption \_\_\_\_\_ 10 VA typical plus all external loads<sup>1</sup>, 85 VA max.  
(including powered triac outputs)

1. External loads must include the power consumption of any connected modules such as subnet devices, wireless module (1VA) and triac outputs.. Refer to the respective module's datasheet for related power consumption information.

## Communications

Communication \_\_\_\_\_ LonTalk Protocol

Transceiver \_\_\_\_\_ FT 5000 Free Topology Smart Transceiver

Channel \_\_\_\_\_ TP/FT-10; 78Kbps

LonMark Interoperability Guidelines \_\_\_\_\_ Version 3.4

Device Class \_\_\_\_\_ SCC Generic #8500

LonMark Functional Profile :

Input Objects \_\_\_\_\_ Open-Loop Sensor #1

Output Objects \_\_\_\_\_ Open-Loop Actuator #3

Node Object \_\_\_\_\_ Node Object #0

Real Time Clock \_\_\_\_\_ Real Time Keeper #3300

Scheduler \_\_\_\_\_ Scheduler #20020

Calendar \_\_\_\_\_ Calendar #20030

Programmable Device \_\_\_\_\_ Static Programmable Device #410

SCC Object \_\_\_\_\_ SCC Generic #8500

## Hardware

Processor \_\_\_\_\_ STM32 (ARM Cortex™ M3) MCU, 32 bit

CPU Speed \_\_\_\_\_ 68 MHz

Memory \_\_\_\_\_ 384 kB Non-volatile Flash (applications)

\_\_\_\_\_ 1 MB Non-volatile Flash (storage)

\_\_\_\_\_ 64 kB RAM

Real Time Clock (RTC) \_\_\_\_\_ Built-in Real Time Clock without battery

\_\_\_\_\_ Network time synchronization is required at each  
power-up cycle before the RTC become available

Status Indicator \_\_\_\_\_ Green LEDs: power status & LAN Tx

\_\_\_\_\_ Orange LEDs: controller status & LAN Rx

## Subnetwork

Communication	RS-485
Cable	Cat 5e, 8 conductor twisted pair
Connector	RJ-45
Connection Topology	Daisy-chain
Maximum Number of Allure Series Communicating Sensors combined	4 <sup>1</sup>

1. A controller can support a maximum of two Allure Series Communicating Sensor models equipped with a CO<sub>2</sub> sensor. The remaining connected Allure Series Communicating Sensor models must be without a CO<sub>2</sub> sensor.

## Wireless Receiver<sup>1</sup>

Communication Protocol	EnOcean wireless standard
Number of Wireless Inputs <sup>2</sup>	18
Supported Wireless Receivers	Refer to the Open-to-Wireless Solution Guide
Cable	Telephone cord
<input type="checkbox"/> Connector	4P4C modular jack
<input type="checkbox"/> Length (maximum)	6.5ft (2m)




1. Available when an optional external Wireless Receiver module is connected to the controller. Refer to the Open-to-Wireless Solution Guide for a list of supported EnOcean wireless modules.
2. Some wireless modules may use more than one wireless input from the controller.

## Mechanical

Dimensions (H × W × D):

ECL-103 5.2 × 7.1 × 2.13" (133 × 180 × 54.0 mm)

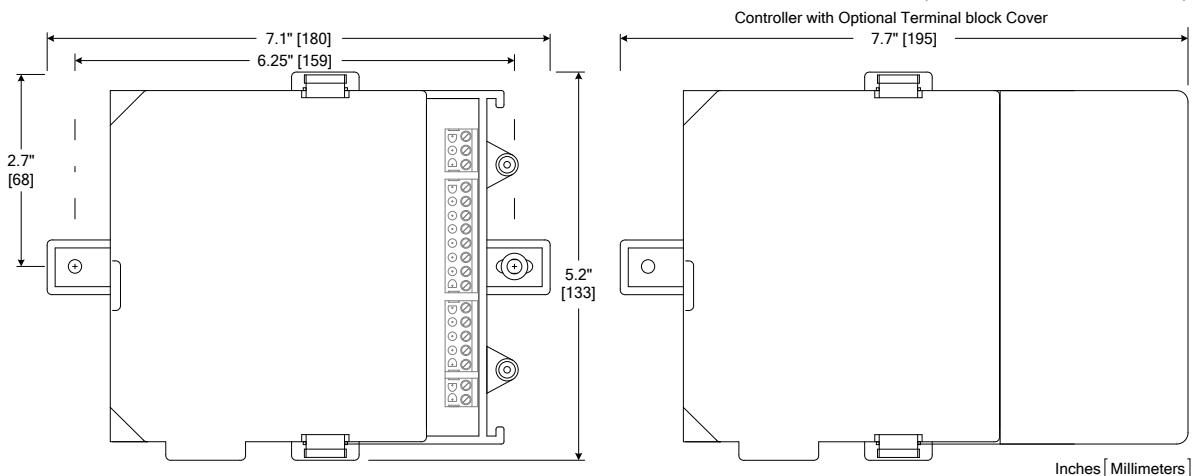

Shipping Weight:

ECL-103 0.92lbs (0.42 kg)

Enclosure Material<sup>1</sup> FR/ABS

Enclosure Rating Plastic housing, UL94-5VB flammability rating

Plenum rating per UL1995

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

## Environmental

Operating Temperature ————— 32°F to 122°F (0°C to 50°C)

Storage Temperature ————— -4°F to 122°F (-20°C to 50°C)

Relative Humidity ————— 0 to 90% Non-condensing

## Standards and Regulations

CE:

Emission ————— EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments

Immunity ————— EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC ————— This device complies with FCC rules part 15, subpart B, class B

UL Listed (CDN & US) ————— UL916 Energy management equipment

CEC Appliance Database ————— Appliance Efficiency Program<sup>1</sup>

1. California Energy Commission's Appliance Efficiency Program: The manufacturer has certified this product to the California Energy Commission in accordance with California law.



## Specifications - Universal Inputs (UI)

### General

Input Type ————— Universal; software configurable

Input Resolution ————— 16-bit analog / digital converter

Power Supply Output ————— 15VDC; maximum 80mA

### Contact

Type ————— Dry contact

### Counter

Type ————— Dry contact

Maximum Frequency ————— 1Hz maximum,

Minimum Duty Cycle ————— 500milliseconds On / 500milliseconds Off

### 0 to 10VDC

Range ————— 0 to 10VDC (40kΩ input impedance)

### 0 to 5VDC

Range ————— 0 to 5VDC (high input impedance)

### 0 to 20mA

Range ————— 0 to 20mA

————— 249Ω external resistor wired in parallel

## Resistance/Thermistor

Range 0 to 350 K $\Omega$

Supported Thermistor Types Any that operate in this range

Pre-configured Temperature Sensor Types:

- Thermistor 10K $\Omega$  Type 2, 3 (10K $\Omega$  @ 77°F; 25°C)
- Platinum Pt1000 (1K $\Omega$  @ 32°F; 0°C)
- Nickel RTD Ni1000 (1K $\Omega$  @ 32°F; 0°C)  
RTD Ni1000 (1K $\Omega$  @ 69.8°F; 21°C)

## Specifications - Universal Outputs (UO)

### General

Output Type Universal; software configurable

Output Resolution 10-bit digital to analog Converter

Output Protection Built-in snubbing diode to protect against back-EMF,  
for example when used with a 12VDC relay  
Output is internally protected against short circuits

Load Resistance Minimum 600  $\Omega$  for 0-10VDC and 0-12VDC outputs

Auto-reset fuse Provides protection from accidental 24VAC connection

### 0 or 12VDC (On/Off)

Range 0 or 12VDC

Source Current Maximum 20 mA at 12VDC (minimum load resistance 600 $\Omega$ )<sup>1</sup>

1. Relays equipped with coil that consume between 20 and 35mA can be used with up to 2 Universal Outputs when the 15V Power Supply Output is de-rated to supply 50mA maximum current.

### PWM

Range Adjustable period from 2 to 65seconds

Thermal Actuator Management Adjustable warm up and cool down time

### Floating

Minimum Pulse On/Off Time 500milliseconds

Drive Time Period Adjustable

### 0 to 10VDC

Voltage Range 0 to 10VDC linear

Source Current Maximum 20 mA at 10VDC (minimum load resistance 600  $\Omega$ )



# Specifications - Digital Output (DO)

## General

Output Type \_\_\_\_\_ 24VAC Triac; software configurable

Maximum Current per Output \_\_\_\_\_ 0.5A continuous

\_\_\_\_\_ 1A @ 15% duty cycle for a 10-minute period

Power Source \_\_\_\_\_ External or internal power supply (jumper selectable)

## 0 or 24VAC (On/Off)

Range \_\_\_\_\_ 0 or 24VAC

## PWM

Range \_\_\_\_\_ Adjustable period from 2 to 65seconds

## Floating

Minimum Pulse On/Off Time \_\_\_\_\_ 500milliseconds

Drive Time Period \_\_\_\_\_ Adjustable

Power Source \_\_\_\_\_ External or internal power supply (jumper selectable)

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Innovative Solutions for Greener Buildings, EC-Net, ECO-Vue, Allure, and Open-To-Wireless are trademarks of Distech Controls Inc.; LonWorks, LON, and LNS are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association; Niagara<sup>AX</sup> Framework is a registered trademark of Tridium, Inc.; EnOcean is a registered trademark of EnOcean GmbH. All other trademarks are property of their respective owners.  
©, Distech Controls Inc., 2012 - 2018. All rights reserved.

