

RP972A Pneumatic Reversing Relay

SPECIFICATION DATA



FEATURES

- Reverse acting
- In-line mounting; or can be surface or panel mounted with standard 1-1/2 in. diameter cable clamp
- Neoprene diaphragm
- Stainless steel valve seats

GENERAL

The RP972A Pneumatic Reversing Relay is a modulating relay suitable for all types of heating and air conditioning control systems. It is used as a reversing relay to reverse and increase the capacity of the branchline pressure to the final control element.

DESCRIPTION

The RP972A Pneumatic Reversing Relay is a modulating relay suitable for all types of heating and air conditioning control systems. It is used as a reversing relay to reverse and increase the capacity of the branchline pressure to the final control element.

SPECIFICATIONS

Model:

RP972A Reverse Relay

Action:

Reverse acting

Output:

Proportional (branchline pressure decreases with increase in input signal at ratio of 1:1)

Settings:

B: Output (Port 2) = 16 psi (110 kPa)
 - Input (Port 3) Factory set
 C: Output = 18 psi (124 kPa) - Input
 A: Output = 13 psi (90 kPa) - Input

Operating Range:

0 to 18 psi (0 to 124 kPa)

Maximum Safe Air Pressure:

30 psi (207 kPa)

Operating Pressures:

Input: -3 to 15 psi (-21 to 103 kPa)
 Main: 18 psi (124 kPa)

Materials of Construction:

Neoprene diaphragm
 Stainless steel valve seats


Ambient Temperature Limits:

0 to 140F (-18 to 60C)

Air Connections:

Port 1 (Main, Supply): Sharp barb for 1/4-in. (6-mm) O.D. tubing
 Ports 2, 3, and 4 (Branch, Output; Pilot, Input; and Exhaust, respectively): Sharp barb for 5/32-in. (4-mm) O.D. tubing

Dimensions In Inches (Millimeters):

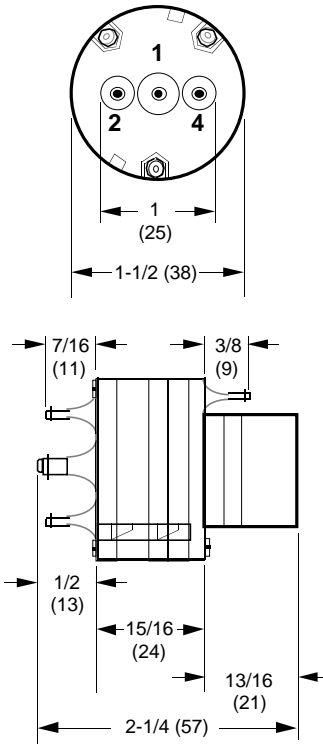

C4860

Air Handling Capacity (Feed and Bleed):

0.039 scfm at ± 1.02 psi droop (18.3 ml/sec at 7 kPa droop)
 Nominal mainline: 18 psi (124 kPa)
 Input: 9 psi (62 kPa)

Air Consumption:

0.002 scfm (1.0 ml/sec) maximum

Filters:

100 mesh stainless steel, main and branch ports

Accessories:

For surface or panel mounting order either:
 Mounting Clamp—810629S
 Mounting Clip—14003030-001

Mounting:

In-line
 Surface or panel using standard 1-1/2 in. dia. mounting clamp or clip

Home and Building Control

Honeywell Inc.
 Honeywell Plaza
 P.O. Box 524
 Minneapolis MN 55408-0524

Honeywell Latin American Division

Miami Lakes Headquarters
 14505 Commerce Way Suite 500
 Miami Lakes FL 33016

Home and Building Control

Honeywell Limited-Honeywell Limitée
 740 Ellesmere Road
 Scarborough Ontario

Honeywell Europe S.A.

3 Avenue du Bourget
 B-1140 Brussels Belgium

Honeywell Asia Pacific Inc.

30th Floor, Office Tower
 Convention Plaza
 1 Harbour Road
 Wanchai
 Hong Kong

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

Honeywell

Helping You Control Your World

