


VP522A & B Sequencing Water Valves

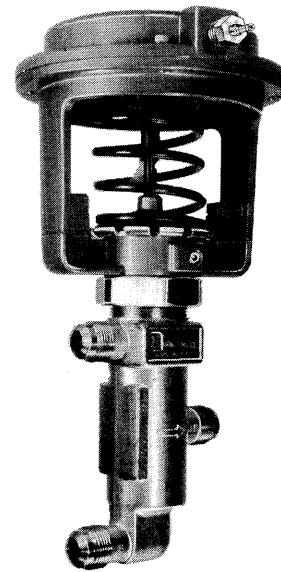

R1020

GENERAL

The VP522 Sequencing Water Valve is a three-pipe, sequencing, pneumatically operated water valve for controlling both hot and cold water flow in fan-coil and induction units.

FEATURES

- Corrosion resistant
- Molded-in composition discs for tight shutoff
- Flared connections for easy installation
- Operator rotatable 360 degrees for convenient air piping alignment

VP522A & B Sequencing Water Valves

DESCRIPTION

The VP522 Sequencing Water Valve is a three-pipe, sequencing, pneumatically operated water valve for controlling both hot and cold water flow in fan-coil and induction units.

SPECIFICATIONS

Models:

Model Number	√	Valve Size (In.)		Capacity Index (Cv)		Close-Off, psi (kPa)
		Nominal	O. D. Copper Tubing	Port A	Port B	
VP522A		3/8	1/2	1.5	1.5	50 (345)
Proportioning-Sequencing		3/8	1/2	0.9	0.5	50 (345)
		1/2	5/8	2.5	1.6	50 (345)
		3/4	7/8	4.0	2.5	45 (310)
VP522B		3/8	1/2	1.5	1.5	†
Diverting-Sequencing*		1/2	5/8	2.5	2.5	
		3/4	7/8	4.0	3.5	

* Used with VP522A on four-pipe systems.

† VP522B close-off rating maintains closure against 15 psi (103 kPa) difference in return line pressures when used with VP522A. Combination is subject to maximum differential pressure limits of VP522A.

Construction:

Body: Forged brass
 Seats: Brass; upper seat replaceable, lower seat integral
 Disc: Molded-in composition
 Plug: Brass
 Packing: Rubber V-ring, spring-loaded, self-adjusting
 Stem: Stainless steel

Flow Characteristics:

VP522A: Equal percentage through 5/16-in. lift for either port
 VP522B: Quick opening through 3/16-in. lift for either port

Body Pressure Rating (Nominal):

250 psi (1724 kPa)

Controlled Medium Temperature:

35 to 250F (2 to 121C)

End Connections:

45 degree SAE flare

Actuator:

Molded neoprene, rolling-diaphragm type

Air Connection:

Combination barb for 5/32-in. (4-mm) or 1/4-in. (6-mm) O.D. plastic tubing

Maximum Safe Air Pressure:

25 psi (172 kPa)

Maximum Safe Diaphragm Temperature:

160F (71C)

Startpoint and Operating Range:


VP522A: Nonadjustable. Refer to Operation.

VP522B: Startpoint adjustable from 2.0 to 5.5 psi (14 to 38 kPa). Refer to Operation.

VP522A & B Sequencing Water Valves

Operation:


The VP522B is functionally a two-position valve coupled to the return side of the coil. The VP522B diverts the return water from the coil directly to the chiller or the boiler. During the dwell period of the VP522A, when both ports are closed but the valve is moving towards opening either the hot or cold port, the VP522B is actuated to open the proper port.

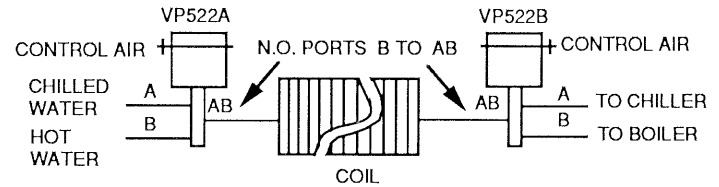

C4672

VP522A		psi (kPa)	VP522B
3/8 in. Nominal	1/2 & 3/4 in. Nominal		All Sizes
Hot port open 100%	Hot port open 100%	0 (0)	Hot port open 100%
		1 (7)	
		2 (14)	
Hot port closes	Hot port closes	3 (21)	Hot port closes
		4 (28)	
		5 (34)	
Both ports closed	Both ports closed	6 (41)	Both ports closed
		7 (48)	
		8 (55)	
Cold port opens	Cold port opens	9 (62)	Cold port opens
		10 (69)	
		11 (76)	
Cold port open 100%	Cold port open 100%	12 (83)	Cold port open 100%
		13 (90)	
		14 (97)	
		15 (103)	

Dimensions in Inches (Millimeters):

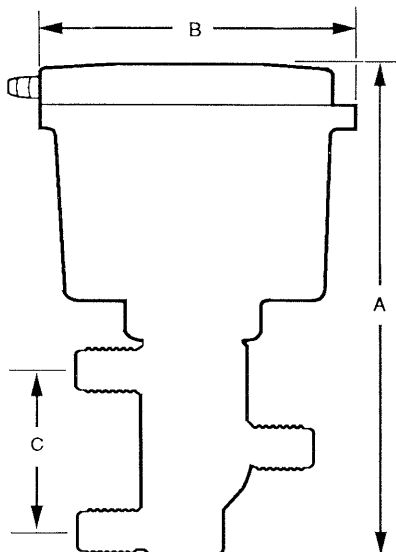

C4671

Nominal Valve Size	A	B	C
3/8	9-13/16 (249)	5-1/8 (130)	3-5/8 (92)
1/2	9-15/16 (252)	5-1/8 (130)	3-5/32 (80)
3/4	9-15/16 (252)	5-1/8 (130)	3-5/32 (80)

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.