



CCE-1000 Series Pneumatic-Electric Switches

Description

The KMC CCE-1000 Series pneumatic-electric relays are designed for use in HVAC system control circuits. The CCE-1000 series are ideal for applications such as starting fan coil unit fans, exhaust fans, and direct control of electric duct heaters.

Models 1001 and 1003 are single-pole, double-throw units. Models 1002 and 1004 are double-pole, double-throw units.

Models CCE-1001 and 1002 have a case and cover to conceal the switching mechanism. Wiring is accessed through two 1/2" conduit openings.

Models 1003 and 1004 are intended for use in enclosures, such as electric duct heater control panels, and do not have cases or covers.

Features

- ◆ Choice of single-pole, double-throw or double-pole, double-throw units.
- ◆ Models are not position sensitive and may be mounted on surfaces or in enclosures.
- ◆ CCE-1001, 1002 are UL and CSA listed, CCE-1003, 1004 are UL recognized, CSA listed

Application

The CCE-1000 series are ideal for starting fan coil unit fans, exhaust fans, and direct control of electric duct heaters.

!CAUTION

Pneumatic devices MUST operate with CLEAN, DRY, control air. Any other medium will result in the device's eventual failure.



Models


CCE-1001	SPDT, with case and cover
CCE-1002	DPDT, with case and cover
CCE-1003	SPDT, without case and cover
CCE-1004	DPDT, without case and cover

Accessories

HPO-0009	Replacement Diaphragm
----------	-----------------------

Details

All dimensions in inches (mm).

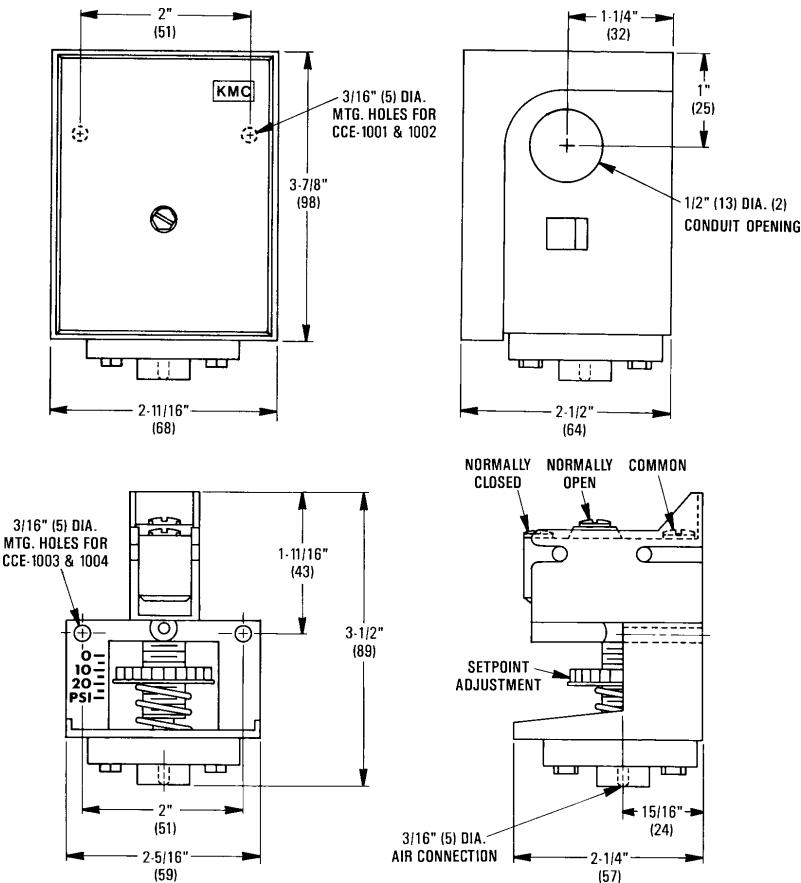

Specifications

Setpoint Range	2 to 25 psig (14 to 172 kPa)	Weight	CCE-1001	10 oz. (283 grams)
Differential	2 psi fixed (14 kPa)		CCE-1002	12 oz. (340 grams)
Pressure Max.	30 psig (207 kPa)		CCE-1003	4 oz. (113 grams)
Switching Action			CCE-1004	6 oz. (170 grams)
CCE-1001	SPDT	Material	Black polycarbonate	
CCE-1002	DPDT	Approvals	CCE-1001, 1002: UL Listed, CSA	
CCE-1003	SPDT		CCE-1003, 1004: UL recognized, CSA	
CCE-1004	DPDT	Temperature Limits		
Connections		Operating	40° to 120° F (4° to 49° C)	
Air	3/16" (5 mm) nipples for 1/4" (6 mm) O.D. polyethylene tubing	Shipping	-40° to 140° F (-40° to 60° C)	
Electrical	8-32 UNC binding head combination terminal screw and cup washer.			
Electrical Ratings	20 amps non-inductive @ 120-240-480 VAC 1 HP @ 120 VAC; 2 HP @ 240 VAC	KMC Controls, Inc.		
		19476 Industrial Drive		
		New Paris, IN 46553		
		574.831.5250		
		www.kmccontrols.com		