

SmartStruxure™ Lite Solution


MPM Series Wireless Manager

Smart  Compatible

Site and zone managers providing 100% wireless integrated control solutions for HVAC, lighting, and metering, as well as remote management via StruxureWare™ Building Expert.



Get Control. Get Efficient. Get Value.



SmartStruxure Lite solution Wireless Manager Features



Multi-Purpose Management devices (MPM) enable the control, monitoring, and management of entire sites via StruxureWare Building Expert. They can also be used for wired and wireless zone control in larger buildings.

Control features

- Wireless control of EnOcean end-devices (optional, 49 points per MPM)
- Wireless control of ZigBee Pro end-devices (optional, 30 peripherals per MPM)
- Programmable via StruxureWare Building Expert
- Points visible through BACnet®, EcoStruxure® Web Services (EWS) and oBIX®
- Real-time response to scripting/graphical programming

Applications

The MPMP-GW has an aesthetic look, similar to a router, allowing for in-room deployment. It supports control and gateway functionality for wireless peripherals for the following applications:

- HVAC room and zone control (actuators, thermostats, sensors)
- Lighting room and zone control (switches, relays, sensors)
- Access (ikeycard readers and occupancy sensors)
- Wireless meters and sub-meters

Networking Between Units

- Wireless: ZigBee Pro wireless mesh network (self-forming/healing, 25 nodes per network)
- Wired: Daisy chain
- IP/Ethernet: Ethernet port

Embedded gateway

- EnOcean (wireless) to BACnet IP/oBIX/EWS
- ZigBee Pro (wireless) to BACnet IP/oBIX/EWS
- Modbus to BACnet IP/oBIX/EWS

StruxureWare Building Expert

All MPM models have an embedded web server hosting Building Expert, a web-based intelligent building management system that allows complete configuration and management of small sites. Building Expert offers dashboards, maps, graphical programming, scripting, scheduling, trend logging and more. It is the perfect mini-iBMS for small and medium buildings. It can also be integrated with other SmartStruxure solutions.

Accessories

- Replacement ZigBee Pro antenna
- Replacement EnOcean antenna for 868MHz and 902 MHz (315 MHz not available)
- Antenna cable extension



AT A GLANCE

Networking

- Ethernet connector for BACnet Ethernet/IP
- 802.15.4 wireless mesh (25 nodes/network)
- Wired serial bus for daisy chain (CANbus)

Third-party interoperability

- BACnet, EWS, oBIX, FTP
- EnOcean (wireless)
- ZigBee Pro (wireless)
- CANbus

Inputs/Outputs

- EnOcean (wireless): 49 devices
- ZigBee Pro (wireless): 30 peripherals

Other

- Real-time clock
- 400MHz processor
- 64MB of RAM
- 4GB of Flash for local storage
- StruxureWare Building Expert

Accessories

- ZigBee and EnOcean antenna
- Antenna cable extension

SmartStruxure Lite solution Wireless Manager Specifications

Specifications

Power

Voltage

24VAC; $\pm 15\%$; 50/60HZ

24VDC $\pm 10\%$

Typical consumption

5 VA + Output (VAC), 1.6 W + Output (VDC)

General

Processor

ARM9 32-bit, 400MHz

Memory

64MB flash

Storage

4GB flash for local storage

Manufacturing Date Code (DC) 1216 and before:

Battery

CR1220 3v Lithium Coin Cell Battery

Real-time clock

Battery backed (10,000 hours)

Manufacturing Date Code (DC) 1316 and after:

Real-time clock

Maintained by 3.3V super-capacitor (48 hours), and charge time of 5 minutes

Communication

ZigBee Pro, EnOcean, BACnet

CANbus (125-500 Kbps)

Ethernet (10/100 Mbps)

Enclosure

Material

Rigid ABS

Dimensions

116mm (4.57in) x 191mm (7.52in)

Rating

UL94V0-5VB

Mounting

Din-rail, wall or ceiling mount

Environmental

Operating Temperature

0°C (32°F) to 60°C (140°F)

Storage Temperature

-20°C (-4°F) to 60°C (140°F)

Relative Humidity

0 to 90% non-condensing

EnOcean (optional)

Frequency

868MHz, or 902MHz

Receiver Sensitivity

-95dBm

Conducted Output Power

5dBm

Range

Recommended: 45ft/15m

Line of sight: 100ft/30m

Antenna

External whip, RP SMA 0dBi

ZigBee Pro (optional)

Frequency

2400 – 2483.5MHz, 16RF channels

Data rate/Mod.type

250Kbps

Receiver Sensitivity

-101dBm/-105dBm (amplified)

Nominal Output Power

8dBm/18dBm (amplified)

Range

Recommended to MPM: 150ft/50m

Line of sight to MPM: 300ft/100m

Recommended to peripherals: 50ft/17m

Line of sight to peripherals: 100ft/30m

Antenna

External whip, RP SMA 2.5dbi

StruxureWare™ Building Expert

Software type

Embedded web interface

Local installation

Not necessary

Browser compatibility

Firefox ESR

Internet Explorer 10 (only)

Google Chrome

Safari (Mac only)

Agency approvals

Energy Management Equipment, UL 916, Fourth Edition, December 23, 1998, rev. December 17, 2007

CSA Standard for Signal Equipment C22.2 No. 205-M1983 (R2004)

CFR47 FCC Part15, Subpart B:2009

ICES-003: Issue 4 (2004)

CE:

Japanese Radio Law

RoHS

Disclaimer

If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.

THIS PRODUCT FOR COMMERCIAL USE ONLY

Disclaimer

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- this device may not cause harmful interference
- this device must accept any interference received, including interference that may cause undesired operation.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- this device may not cause interference
- this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- l'appareil ne doit pas produire de brouillage
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not approved by the manufacturer could void the user's authority to operate the equipment.




This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm during normal operation. This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



SmartStruxure Lite solution Wireless Manager and Antenna

ZigBee Pro (optional)
(Pink striped antenna for 2.4GHz)

EnOcean (optional)
(Gray striped antenna for 868MHz)
(Yellow striped antenna for 902MHz)

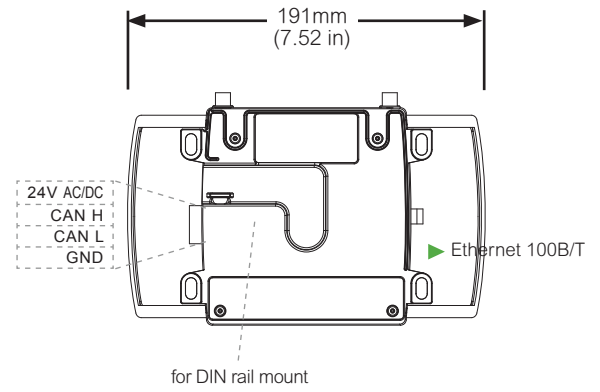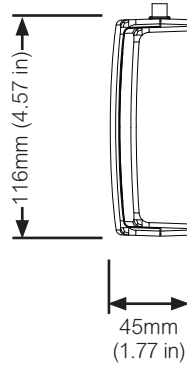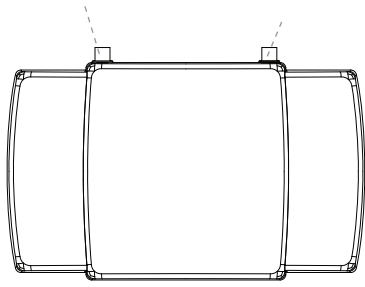

Replacement Antenna



Cable Extension

Ordering information

	Manager		EnOcean*		ZigBee Pro	I/O		VAV		
Part numbers	Building Expert	StruxureWare integration	868 MHz	902 MHz	High power	6 inputs	6 outputs	Modbus	Flow sensor	Actuator
MPM-GW-D00-5045	x	x	x							
MPM-GW-E00-5045	x	x		x						
MPM-GW-DI0-5045	x	x	x		x					
MPM-GW-EI0-5045	x	x		x	x					
MPM-GW-OI0-5045	x	x			x					

	EnOcean Antenna		ZigBee Antenna	Cable
Accessories	868 MHz	902 MHz	Antenna	Extension
MPM-ACC-ANT-0I0			x	
MPM-ACC-ANT-D00	x			
MPM-ACC-ANT-E00		x		
MPM-RAEC-5045				x

*EnOcean: Contact EnOcean for the latest information about the frequency in your country.

902MHz: Americas, Hong Kong, India, Japan, Thailand, Taiwan

868MHz: Europe, China, Malaysia, Singapore, Vietnam, New Zealand

*USA has transitioned to 902 MHz in 2013. Other countries may do so as well.