PRODUCT DEFINITION


VYKON Enterprise Security is a full-featured access control and security application built on the Niagara software platform. The application features an intuitive graphical user interface for managing access control and security that can be tailored for the end user with custom reports and graphics. When the application is hosted on a JACE® controller, it offers a complete access control and security solution that integrates with building control systems. For larger systems, VYKON Enterprise Security may be hosted on a Supervisor to manage databases and aggregate alarm and history data. This provides a robust distributed network architecture for access control, security, video surveillance and building control which meets current requirements for integrated efficient buildings.



KEY ADVANTAGES

- Unified graphical tool set for all connected building systems
- BACnet® server for integration with almost any building automation system
- Scaleable from 2 10,000 doors
- Robust, distributed architecture
- Centralized data management and backup
- Integrated video surveillance
- Customizable access control functions using Niagara tools
- Same JACE 8000 hardware platform can be used for both building automation and security
- Advanced threat level management
- Seamless integration between access control and building systems
- Unified user interface for building systems



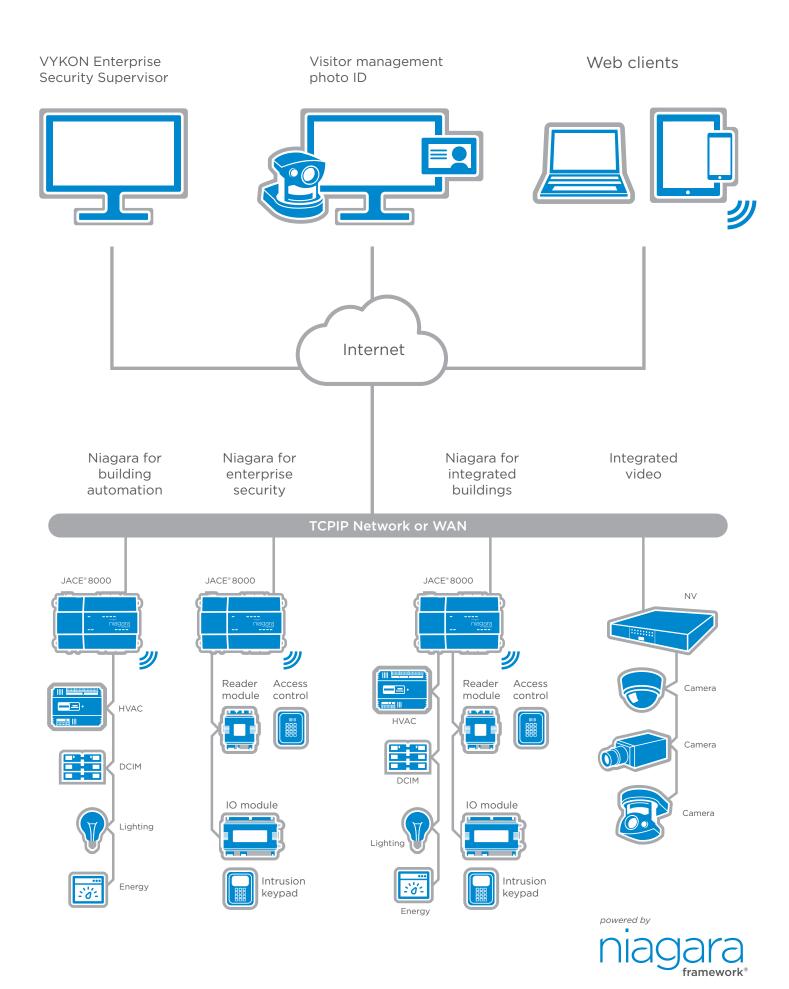

FEATURES

Component	Description	
Database API	Increase the security of your facility by accurately registering visitors and screening them against government databases before granting access to your facility with visitor management integration, or integrate with other personnel systems for centralized management of physical access	
LDAP database integration	Synchronize physical and logical access and manage from a single point of entry	
Role-based users	Control what users view and can access or command	
Threat level management	Change building access control based on up to 255 different threat levels	
Advanced zone management	Count people in a zone, set min and max occupancy limits, require a Supervisor and prevent passback	
Intrusion zone management	Monitor, arm and disarm secured areas	
Elevator floor control	cor floor control Individual floor access control	
Intuitive user interface	Featuring context-sensitive help	
Web client user interface	System access wherever, whenever you need it without additional client licenses	
Configurable wiegand formats	Support for most proximity card formats. Avoid replacing existing credentials when retrofitting systems	
Custom reports	Information presented in various formats	
Custom graphic / map creation	Create custom graphics to provide operators with quick access to critical information	
Video system integration	View and control cameras from the same console as other building functions. Select associated video from the alarm console, or pop-up video when alarms occur	
Integrated identity management	Print badges, verify identity by comparing photo with video feed	
Database import	Import data from other access control systems or HR databases to quickly populate the database	
Alarm escalation	Escalate alarms to remote consoles or email recipients	

VYKON ENTERPRISE SECURITY SUPERVISOR PLATFORM REQUIREMENTS

The VYKON Enterprise Security Supervisor may run acceptably on lower-rated platforms, or may require more powerful platforms, depending on the application, number of data points integrated, data poll rate, number of concurrent users, performance expectations, etc. Minimum platform requirements for a VYKON Enterprise Security server:

- **Processor:** Intel® Xeon® CPU E5-2640 x64 (or better), compatible with dual and quad-core processors
- Operating system: Windows® 7, Windows 8.1 Enterprise, Windows Server 2008, Windows Server 2012 Standard and 2012 R2 Standard, Windows 10
- Memory: 4 GB or more recommended
- Hard drive: 500 GB or more recommended
- **Display:** Video card and monitor capable of displaying 1024 x 768 pixel resolution or greater
- Network support: Ethernet adapter (10/100 Mb with RJ-45 connector)
- Connectivity: Full-time high-speed ISP connection recommended for remote site access (i.e. T1, ADSL, cable modem)



ORDERING INFORMATION

VYKON Enterprise Security Supervisor			
Niagara AX Supervisor with VYKON Enterprise Security Appliance. Licensed for 32 readers, MySQL and MSSQL database drivers. May be upgraded to include BAS driver functionality with optional upgrade part.			
SEC-ENT-6	Small Facility Security Supervisor for up to 6 JACE connections		
SEC-ENT-100	Medium Facility Security Supervisor for up to 100 JACE connections		
SEC-ENT-250	Large Facility Security Supervisor for up to 250 JACE connections		
VYKON Enterprise Security Supervisor integrated			
Niagara AX Supervisor with VYKON Enterprise Security Appliance. Licensed for 32 readers, MySQL and MSSQL database drivers. Optional BAS drivers available.			
S-AX-10-INT	Small Facility Integrated Security Supervisor for up to 10 JACE connections		
S-AX-100-INT	Medium Facility Integrated Security Supervisor for up to 100 JACE connections		
S-AX-250-INT	Large Facility Integrated Security Supervisor for up to 250 JACE connections		
VYKON Enterprise Security Supervisor additional reader packs			
SEC-R-16	16 Reader Pack		
SEC-R-64	64 Reader Pack		
SEC-R-256	256 Reader Pack		
SEC-R-1024	1,024 Reader Pack		
VYKON Enterprise Secu	rity Supervisor upgrades		
SEC-BAS-U	Upgrade VYKON Enterprise Security Supervisor to allow BAS driver functionality		
SEC-ENT-U	Upgrade Niagara BAS Supervisor to VYKON Enterprise Security Supervisor with MySQL, MS SQL and 32 readers		
SEC-U-100	Upgrade VYKON Enterprise Security Supervisor from small to medium		
SEC-U-250	Upgrade VYKON Enterprise Security Supervisor from medium to large		
SUP-UP-1	Add one JACE connection to the VYKON Enterprise Security Supervisor		
VYKON Enterprise Secu	rity Supervisor video options		
DR-S-AXS-AX	Axis IP Camera Base Supervisor Driver for 16 cameras		
DR-S-AXS-4	Additional 4 Camera Block for Axis IP Camera Supervisor Driver		
DR-S-DED-AX	Dedicated Micros Base Supervisor Driver for 16 cameras		
DR-S-DED-4	Additional 4 Camera Block for Dedicated Micros Supervisor Driver		
DR-S-MLS-AX	Milestone Base Supervisor Driver for 16 cameras		
DR-S-MLS-4	Additional 4 Camera Block for Milestone System Supervisor Driver		
DR-S-RPD-AX	Honeywell Rapid Eye™ Base Supervisor Driver for 16 cameras		
DR-S-RPD-4	Additional 4 Camera Block for Honeywell Rapid Eye Supervisor Driver		
VYKON Enterprise Security Supervisor photo ID			
DR-SEC-S-ASURE	Photo ID Driver - enables photo import and integrated photo ID management. Integrates with SEC-ASURE-ID (HID® Asure ID SDK) software which is required for designing badge templates, printing badges and capturing photos		
SEC-ASURE-ID	HID Asure ID SDK Software - used for photo capture, creating badge templates and printing badges		
VYKON Enterprise Secu	rity Supervisor database integration		
DR-S-ISOM	Provides a secure restful interface to integrate with the VYKON Enterprise Security Supervisor card holder database. May be used to integrate with Easy Lobby® and other 3rd party systems.		
SEC-EL-ACI-Niagara	Easy Lobby Access Control Integration plug-in for Niagara. Requires separately purchased Easy Lobby SVM version 10.		
DR-S-LDAP	Provides interface to integrate the VYKON Enterprise Security Supervisor card holder database to Active Directory/LDAP. Custom configuration of LDAP/Active Directory Database may be required		

ORDERING INFORMATION (CONTINUED)

VYKON Enterprise Secu	rity Supervisor revision upgrade		
SEC-REV-6	Security Small Building Revision Upgrade to current Niagara AX version		
SEC-REV-100	Security Supervisor Revision Upgrade to current Niagara AX version		
SEC-REV-250	Security Large System Revision Upgrade to current Niagara AX version		
VYKON Enterprise Security Supervisor maintenance			
Effective for one Maintenance Term (a period of at least 12 months, as defined in Tridium's Software Maintenance Terms and Conditions). Upgrades licenses to Niagara 4 releases issued during the Maintenance Term for which the maintenance is purchased. Subject to Tridium's Software Maintenance Terms and Conditions. The Software Maintenance Terms and Conditions are posted in the resource library on Tridium's website.			
SEC-ENT-6-MA	Security Small Building Maintenance for 1 term		
SEC-ENT-100-MA	Security Supervisor Maintenance for 1 term		
SEC-ENT-250-MA	Security Large System Maintenance for 1 term		
VYKON Enterprise Security JACE 8000 application			
SEC-J8-AX	Niagara AX Security license for JACE 8000 controller. Includes licensing for 32 readers (not included in capacity). And JACE 8000 Niagara AX license option. (JACE-8000-AX). Does not include JACE 8000 controller.		
VYKON Security JACE a	ccessories		
SEC-R2R	Security module for 2 Readers/Access doors and 2 digital inputs		
SEC-RIO	Security module with 8 supervised inputs, 8 relay outputs and 2 digital inputs		
SEC-INT-Keypad	Intrusion keypad with LCD display for arming/disarming security zones		
SEC-ENC-LNP	Large Enclosure with keyed lock, door status switch, 2 din rails for mounting JACE 8000 controller and up to 4 Remote Reader Modules or 2 Remote IO Modules. Several other combinations of devices may be mounted in this panel. Dimensions: 17"W x 22"H x 4"D.		
NPB-PWR	DIN rail mountable power supply. 24 VAC/VDC input, 15 VDC 30 VA output. May be used to power modules from the same battery-backed 24 VDC power supply that is used for the JACE.		
NPB-PWR-UN	DIN rail mountable power supply. Universal input accepts 90-263 VAC 50/60Hz input, 15 VDC 30 Watt output. May be used to power modules where battery backup is not required.		
VYKON Security JACE 602/616 video drivers			
DR-AXS-AX-4	Axis IP camera driver for 4 cameras		
DR-DED-AX-4	Dedicated Micros video driver for 4 cameras		
DR-MLS-AX-4	Milestone video driver for 4 cameras		
DR-RPD-AX-4	Honeywell RapidEye™ video driver for 4 cameras		
Access control integration drivers			
DR-ISOM	Driver for Easy Lobby Visitor Management System on VYKON Security JACE. Does not include Easy Lobby Visitor Management Software.		
DR-LDAP	Provides interface to integrate the VYKON Security JACE card holder database to Active Directory/LDAP. Custom configuration of LDAP/Active Directory Database may be required.		



SPECIFICATIONS

	VYKON Enterprise Security Supervisor	SEC-J-602/616, JACE-8000
Personnel	1,000,000	20,000
Card readers	10,000	32
Access rights	25,000	250
Schedules	1,500	100
Access zones	25,000	50
Simultaneous users	25	10
Area controllers	250	N/A

AGENCY CERTIFICATIONS

SEC-J-602, SEC-J-616, SEC-R2R, SEC-RIO, NPB-PWR-UN Enterprise Security Field hardware parts are listed as compliant for the following:

- UL 294 Access Control System Units
- CSA C22.2 No. 205 Signal Equipment

JACE 8000:

- UL 916
- CE EN 61326-1
- RCM
- FCC Part 15 Subpart B, Class B
- FCC Part 15 Subpart C
- C-UL listed to Canadian Standards Association (CSA)
 C22.2 No. 205-M1983 "Signal Equipment"
- 1999/5/EC R&TTE Directive
- CCC
- SRRC
- RSS
- RoHS

COMPATIBILITY

Niagara AX 3.8u2 or later

- VYKON Security JACE 602/616 and the JACE 8000 support the VYKON Enterprise Security application
- Security JACEs must be at the same version as the enterprise server
- Standard (non-VYKON Security) JACEs must be at the same or earlier version as the enterprise server; 3.6u4, 3.7u1 and 3.8r and higher are supported

Microsoft® Sequal Server® and Sequal Server Express® 2003 - 2012

MySQL™: Verified with versions up to 5.7.9

Browsers: Internet Explorer® 10 and 11

Current versions of Google Chrome® and Mozilla Firefox® do not support views that require WbApplet

Java® Web Start version 8 Update 73 or later supports WbApplet views without browser support

To learn more about how to purchase and install VYKON Enterprise Security, contact your VYKON partner. The global community of certified Niagara professionals can serve your unique business needs across any industry or geographic region.



vykon.com

© 2017 Tridium Inc. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

Information and/or specifications published here are current as of the date of publication of this document. Tridium, Inc. reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters, Richmond, Virginia. Products or features contained herein may be covered by one or more U.S. or foreign patents. This document may be copied only as expressly authorized by Tridium in writing. It may not otherwise, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form.