


data

SHEET

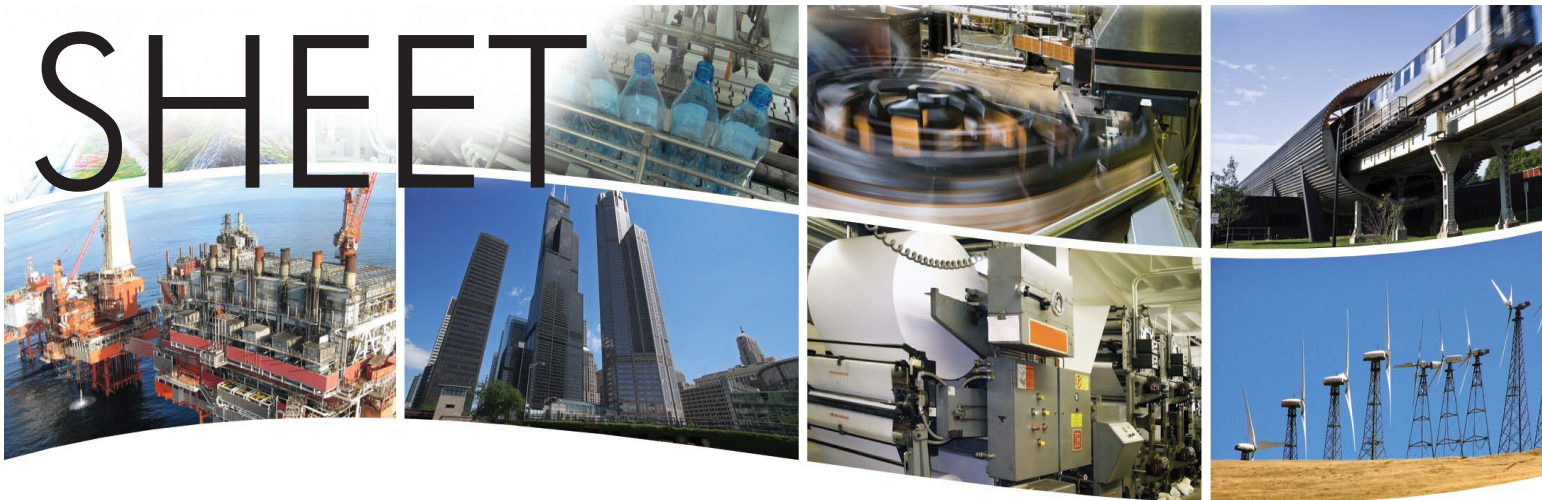

Compact Ethernet Switch — Industrial Temperature


The EICP Series offers a compact rugged 10/100 Mbps Ethernet switch with a choice of eight copper ports or a mix of six copper and two fibre ports. The units are extremely compact and intended for use where indoor temperatures are expected. Fibre optic distances up to 15 km are possible with the single-mode option. Each unit can be powered from a low-voltage AC or DC source.



EICP9-100T

Features

- Choose all 10/100 Mbps copper ports or add two fibre ports
- Single-mode fibre distances up to 15 km
- Industrial temperature range: 0°C to +60°C
- 10–36 VDC or 8–24 VAC powered
- LEDs for link/activity, data rate and power
- UL and C-UL listed, CE Mark, RoHS compliant

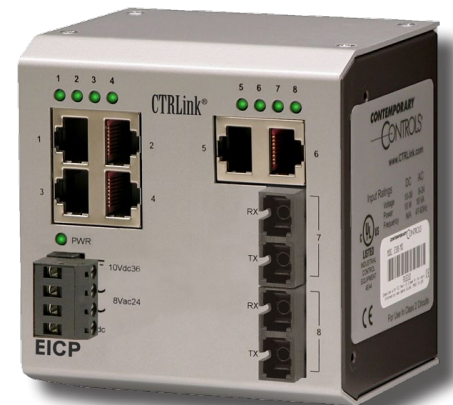

EICP8-100T/FC

CTRLink®

Product Overview

The EICP Series provides standard plug-and-play features such as auto-negotiation and Auto-MDIX — allowing for quick and simple installation. However, these features plus full-duplex can be individually set for each copper port.


Three models offer two fibre ports. You can choose single-mode transceivers with SC connectors (providing 15 km cable distance) or multimode transceivers with either SC or ST connectors.

The copper ports can auto-negotiate 10 Mbps, 100 Mbps, half- or full-duplex. With Auto-MDIX, either straight-through or crossover cables may be used to

connect any of the copper ports to similar ports on another switch.

In addition to one power LED, each port has LEDs showing link/activity/data rate by colour: green for 100 Mbps and yellow for 10 Mbps. Flashing indicates port activity.

The EICP Series can be DIN-rail mounted or directly mounted to a panel. There are several low-voltage AC or DC powering options from 8–24 VAC or from 10–36 VDC. Provisions exist for redundant power connections.

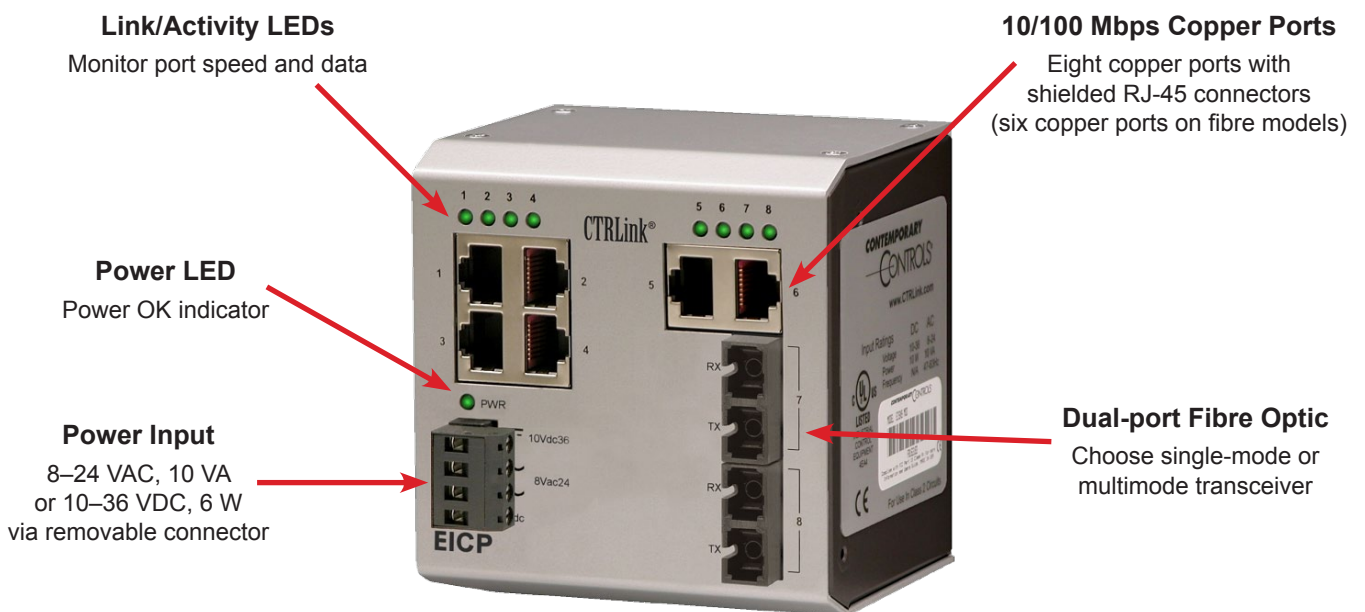

Specifications

Power Requirements	10–36 VDC, 6 W or 8–24 VAC, 10 VA, 47–63 Hz (see last page for details)				
Operating Temperature	0°C to 60°C				
Storage Temperature	–40°C to 85°C				
Relative Humidity	10–95%, non-condensing				
Protection	IP30				
Mounting	TS-35 DIN-rail or panel mount				
Shipping Weight	1 lb (0.45 kg)				
Ethernet Communications	IEEE 802.3 10/100 Mbps data rate 10BASE-T, 100BASE-TX physical layer, 100 m (max) CAT5 cable length 100BASE-FX physical layer, 15 km (max) single-mode [2 km (max) multimode] fibre optic cable length				
LEDs	<table border="0"> <tr> <td>Power</td> <td>Green = power OK</td> </tr> <tr> <td>Link</td> <td>Yellow = 10 Mbps Green = 100 Mbps Flashing = Activity</td> </tr> </table>	Power	Green = power OK	Link	Yellow = 10 Mbps Green = 100 Mbps Flashing = Activity
Power	Green = power OK				
Link	Yellow = 10 Mbps Green = 100 Mbps Flashing = Activity				

Regulatory Compliance


CE Mark; CFR 47, Part 15 Class A; RoHS;
UL 508 Listed Industrial Control Equipment




RJ-45 Connector Pin Assignments

Ethernet

Pin	Function
1	+TD
2	–TD
3	+RD
4	N/C
5	N/C
6	–RD
7	N/C
8	N/C




Mechanical Drawing

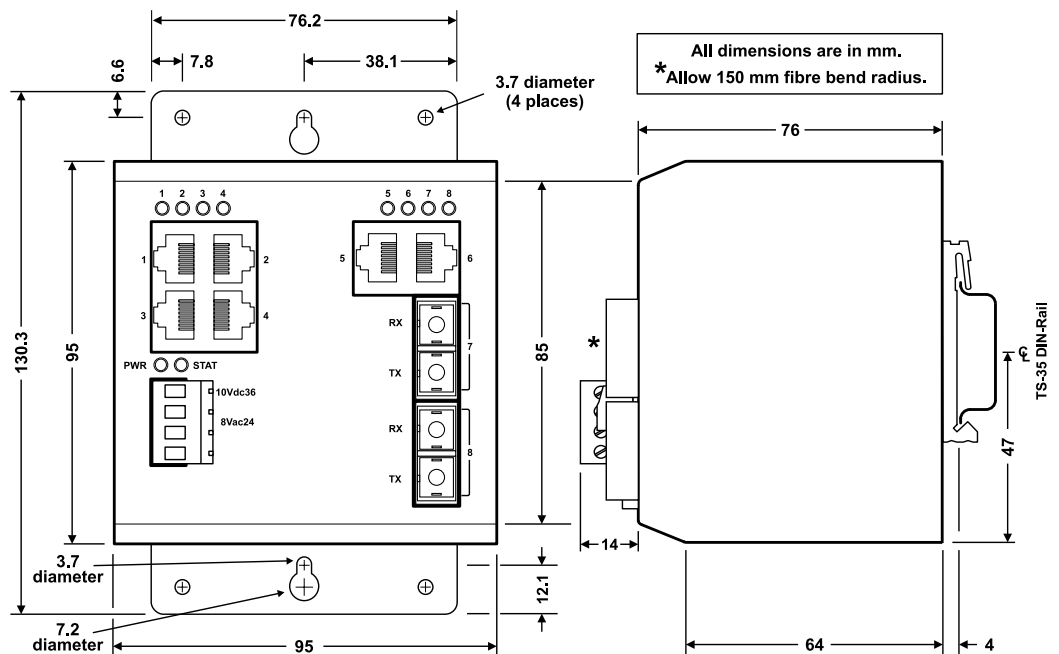


Optional Panel Mounting Bracket (depicted above) is included.

Standard DIN-Rail Mounting Bracket (depicted above) is pre-attached.


Power Diagrams




AC Powered




AC Powered with Grounded Secondary



DC Powered



Redundant DC Powered



AC Powered with Battery Backup

The EICP Series incorporates a full-wave rectifier requiring an 8–24 VAC input from a dedicated transformer whose secondary is not grounded. Power requirements are 10 VA maximum. Sharing the same power source with other devices is not recommended.

The unit can also be powered through a half-wave rectifier which allows the sharing of the same transformer with other half-wave devices. In this case, the transformer secondary is referenced to the unit's 0 Vdc pin and could be grounded as well. For half-wave operation, the AC input should be 24 VAC \pm 10%. Power requirements will increase to about 12 VA maximum.

For DC operation in the range of 10–36 VDC, connect as shown. Power consumption is 6W maximum.

A redundant DC power arrangement is possible as shown. Verify that each power source can deliver the same range of voltage and power as in the DC Powered example.

Mixing of AC and DC sources is possible in order to achieve battery backup when AC is the primary source. In this case the transformer secondary must be floating.

Ordering Information

Model	RoHS	Description
EICP9-100T	✓	Nine-port 10BASE-T/100BASE-TX compact switch
EICP9-100T/FC	✓	Eight-port 100BASE-TX/one-port 100BASE-FX (multimode) switch, SC connectors
EICP9-100T/FCS	✓	Eight-port 100BASE-TX/one-port 100BASE-FX (single-mode) switch, SC connectors
EICP9-100T/FT	✓	Eight-port 100BASE-TX/one-port 100BASE-FX (multimode) switch, ST connectors
EICP8-100T/FC	✓	Six-port 100BASE-TX/two-port 100BASE-FX (multimode) switch, SC connectors
EICP8-100T/FCS	✓	Six-port 100BASE-TX/two-port 100BASE-FX (single-mode) switch, SC connectors
EICP8-100T/FT	✓	Six-port 100BASE-TX/two-port 100BASE-FX (multimode) switch, ST connectors

United States

Contemporary Control Systems, Inc.
2431 Curtiss Street
Downers Grove, IL 60515
USA

Tel: +1 630 963 7070
Fax: +1 630 963 0109

info@ccontrols.com
www.ccontrols.com

China

Contemporary Controls (Suzhou) Co. Ltd
11 Huoju Road
Science & Technology Industrial Park
New District, Suzhou
PR China 215009

Tel: +86 512 68095866
Fax: +86 512 68093760

info@ccontrols.com.cn
www.ccontrols.asia

United Kingdom

Contemporary Controls Ltd
Sovereign Court Two
University of Warwick
Science Park
Sir William Lyons Road
Coventry CV4 7EZ
United Kingdom

Tel: +44 (0)24 7641 3786
Fax: +44 (0)24 7641 3923

info@ccontrols.co.uk
www.ccontrols.eu

Germany

Contemporary Controls GmbH
Fuggerstraße 1 B
04158 Leipzig
Germany

Tel: +49 341 520359 0
Fax: +49 341 520359 16

info@ccontrols.de
www.ccontrols.eu