


B215HT029 Technical Data Sheet


Stainless Steel Ball and Stem

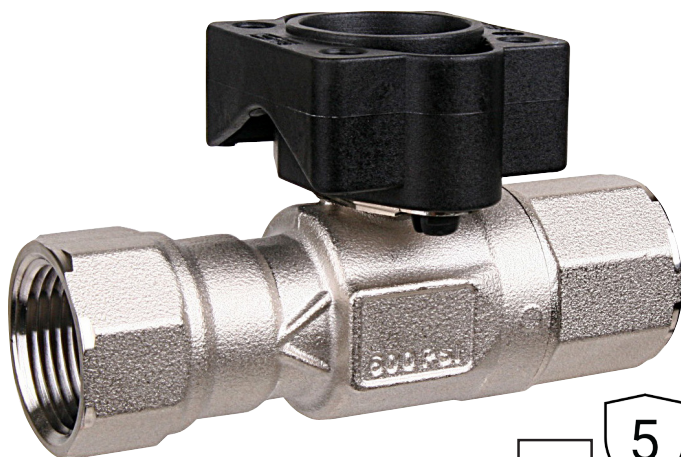

Technical Data

Fluid	high temperature hot water/low pressure steam, up to 60% glycol
Flow characteristic	A-port equal percentage
Controllable flow range	75°
Valve Size [mm]	0.5" [15]
Pipe connection	NPT female ends
Housing	Nickel-plated brass (DZR) P-CuZn35Pb2
Ball	stainless steel
Stem	stainless steel
Stem seal	Viton O-ring
Seat	ETFE
O-ring	EPDM (lubricated)
Characterized disc	ETFE
Body Pressure Rating	600 psi
Maximum Inlet Pressure (Steam)	15 psi
Max Differential Pressure (Steam)	15 psi
Close-off pressure Δps	200 psi
Cv	0.29
Weight	0.66 lb [0.30 kg]
Fluid Temp Range (water)	60...266°F [16...130°C]
Leakage rate	0%
Servicing	maintenance-free

Flow/Mounting Details

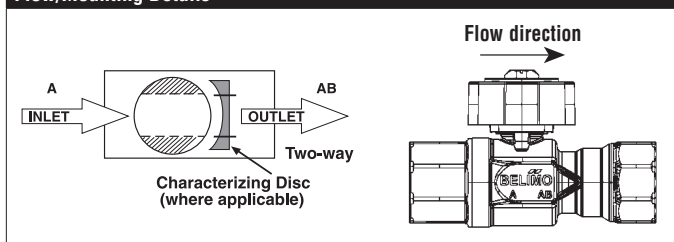

Application


This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include unit ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.

This valve is designed to fit in compact areas where on/off, floating point and modulating control is required using 24 VAC.

Suitable Actuators

	Non-Spring	Spring
B215HT029	TR, LRB(X)	TFRB(X)


Dimensions (Inches [mm])

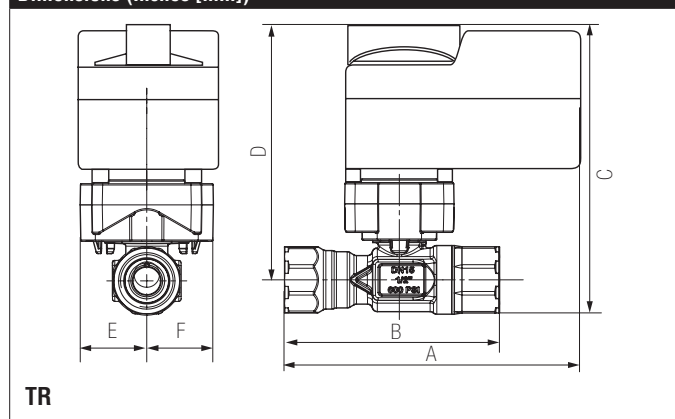


A	B	C	D	E	F
4.2" [106]	3.3" [85]	5.4" [137]	4.9" [125]	1.3" [33]	

Safety Notes

WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

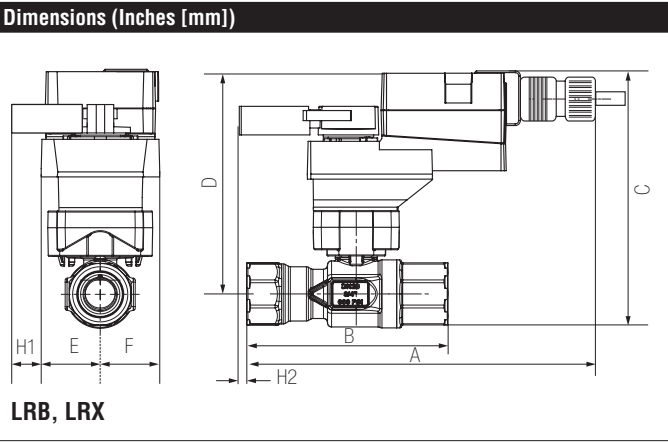

A	B	C	D	E	F	H1	H2
8.3"	3.3"	5.8"	5.3"	1.5" [39]		1.2"	0.6" [15]
[211]	[85]	[147]	[134]			[30]	

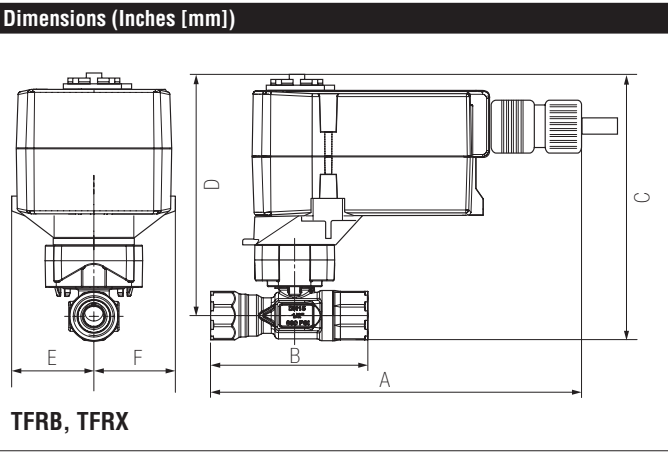

A	B	C	D	E	F
7.3" [185]	3.3" [85]	5.8" [147]	5.3" [134]	1.5" [39]	

TFRB24-3 Technical Data Sheet

Floating Point, Spring Return, 24 V



5-year warranty



Technical Data

Power Supply	24 VAC, ±20%, 50/60 Hz, 24 VDC, ±10%
Power consumption in operation	2.5 W
Power consumption in rest position	1 W
Transformer sizing	4 VA (class 2 power source)
Electrical Connection	18 GA plenum cable, 3 ft [1 m], with 1/2" conduit connector
Overload Protection	electronic throughout 0...95° rotation
Input Impedance	1000 Ω (0.6 W)
Position Feedback	No Feedback
Angle of rotation	Max. 95°, 90°
Torque motor	22 in-lb [2.5 Nm]
Direction of rotation motor	reversible with built-in switch
Direction of motion fail-safe	reversible with cw/ccw mounting
Position indication	Mechanical
Running Time (Motor)	95 s
Running time fail-safe	<25 s
Ambient humidity	max. 95% r.H., non-condensing
Ambient temperature	-22...122°F [-30...50°C]
Storage temperature	-40...176°F [-40...80°C]
Degree of Protection	IP42, NEMA 2, UL Enclosure Type 2
Housing material	UL94-5VA
Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC
Noise level, motor	35 dB(A)
Noise level, fail-safe	62 dB(A)
Servicing	maintenance-free
Quality Standard	ISO 9001
Weight	5.6 lb [0.80 kg]

†Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

Safety Notes

WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

Wiring Diagrams

INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 18 Actuators with plenum cable do not have numbers; use color codes instead.
- Meets cULus requirements without the need of an electrical ground connection.

WARNING! LIVE ELECTRICAL COMPONENTS!
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

