

# B249, 2-Way, Characterized Control Valve


## Stainless Steel Ball and Stem



### Technical Data

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Service                           | chilled, hot water, up to 60% glycol |
| Flow Characteristic               | equal percentage                     |
| Controllable Flow Range           | 75°                                  |
| Size [mm]                         | 2" [50]                              |
| End Fitting                       | NPT female ends                      |
| Body                              | forged brass, nickel plated          |
| Ball                              | stainless steel                      |
| Stem                              | stainless steel                      |
| Stem Packing                      | EPDM (lubricated)                    |
| Seat                              | Teflon® PTFE                         |
| Seat O-ring                       | EPDM (lubricated)                    |
| Characterized Disc                | TEFZEL®                              |
| Body Pressure Rating [psi]        | 400                                  |
| Media Temperature Range (Water)   | 0°F to 250°F [-18°C to 120°C]        |
| Max Differential Pressure (Water) | 50 psi (345 kPa)                     |
| Close-Off Pressure                | 200 psi                              |
| Cv                                | 46                                   |
| Weight                            | 2.9 lb [1.3 kg]                      |
| Leakage                           | 0% for A to AB                       |
| Servicing                         | maintenance free                     |

### Flow Pattern

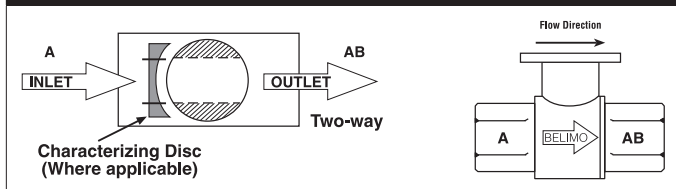


### Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.

### Suitable Actuators

|      | Non-Spring | Spring  |
|------|------------|---------|
| B249 | ARB(X)     | AFRB(X) |


### Dimensions (Inches [mm])

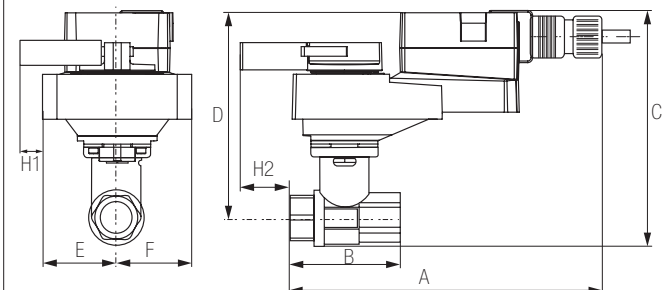


### ARB, ARX

| A     | B     | C     | D     | E     | F    | H1    | H2   |
|-------|-------|-------|-------|-------|------|-------|------|
| 11"   | 4.21" | 6.84" | 5.51" | 1.73" | [44] | 1.18" | 0.5" |
| [279] | [107] | [174] | [140] |       |      | [30]  | [15] |


**B249, 2-Way, Characterized Control Valve**  
Stainless Steel Ball and Stem

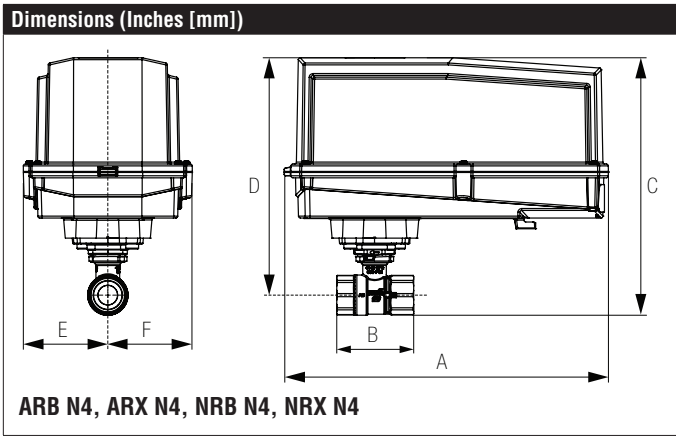


| A               | B           | C          | D           | E          | F |
|-----------------|-------------|------------|-------------|------------|---|
| 11.36"<br>[289] | 4.21" [107] | 9.8" [249] | 7.55" [192] | 3.15" [80] |   |

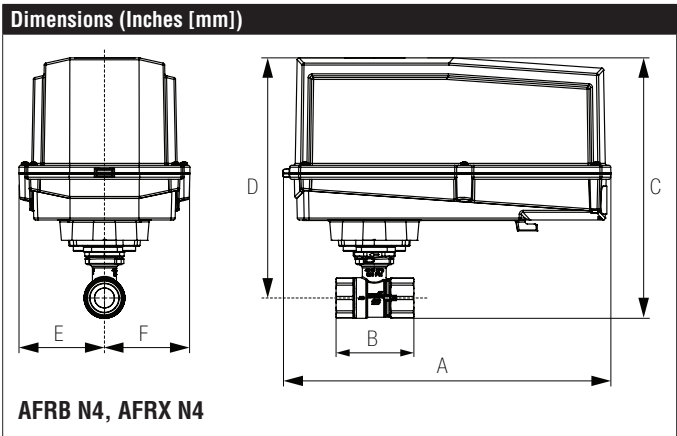

| A               | B           | C               | D           | E          | F |
|-----------------|-------------|-----------------|-------------|------------|---|
| 12.98"<br>[330] | 4.93" [125] | 10.29"<br>[261] | 9.24" [235] | 3.39" [86] |   |

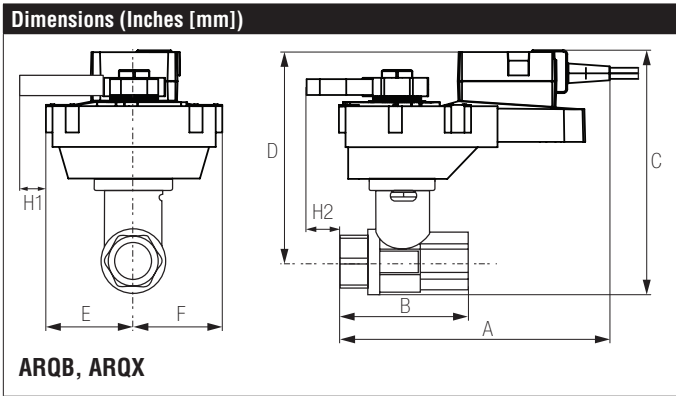

| A            | B           | C           | D           | E          | F | H1         | H2        |
|--------------|-------------|-------------|-------------|------------|---|------------|-----------|
| 11"<br>[279] | 4.21" [107] | 7.45" [190] | 6.11" [155] | 2.28" [58] |   | 0.75" [20] | 0.5" [15] |

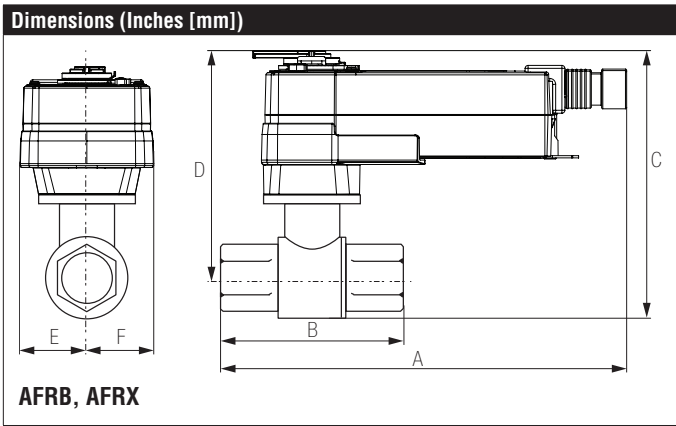

| A               | B           | C           | D           | E          | F |
|-----------------|-------------|-------------|-------------|------------|---|
| 10.82"<br>[275] | 4.21" [107] | 9.47" [241] | 8.14" [207] | 2.02" [51] |   |

# ARX24-SR-T N4

NEMA 4X, Modulating Control, Non-Spring Return, 24 V, for 2 to 10 VDC or 4 to 20 mA



## Technical Data

|                                    |   |
|------------------------------------|---|
| Power Supply                       | 24 VAC, $\pm 20\%$ , 50/60 Hz, 24 VDC, $\pm 10\%$                           |
| Power consumption in operation     | 2.5 W   |
| Power consumption in rest position | 0.4 W   |
| Transformer sizing                 | 5 VA (class 2 power source)   |
| Electrical Connection              | terminal blocks   |
| Overload Protection                | electronic throughout 0° to 90° rotation                                    |
| Operating Range                    | DC 2...10 V, 4 to 20 mA w/ ZG-R01 (500 $\Omega$ , 1/4 W resistor)           |
| Input Impedance                    | 100 k $\Omega$ for 2 to 10 VDC (0.1 mA), 500 $\Omega$ for 4 to 20 mA        |
| Position Feedback                  | DC 2...10 V   |
| Angle of rotation                  | 90°   |
| direction of rotation motor        | reversible with built-in switch   |
| Position indication                | pointer   |
| Manual override                    | under cover   |
| Running time motor                 | default 90 sec, variable 90 or 150 sec                                      |
| Ambient humidity                   | 5 to 95% RH non-condensing  |
| Ambient temperature                | -22...122 °F [-30...50 °C]  |
| Non-operating temperature          | -40...176 °F [-40...80 °C]  |
| Degree of Protection               | IP66/67, NEMA 4X, UL Enclosure Type 4X                                      |
| Agency Listing                     | cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC |
| Noise level, motor                 | <45 dB (A)  |
| Maintenance                        | maintenance free  |
| Quality Standard                   | ISO 9001  |
| Weight                             | 3.3 lbs (1.50 kg)   |

†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 4.

**Wiring Diagrams**
**✂ INSTALLATION NOTES**

- 1 Provide overload protection and disconnect as required.
- 2 Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 5 Only connect common to negative (-) leg of control circuits.
- 7 A 500  $\Omega$  resistor (ZG-R01) converts the 4 to 20 mA control signal to 2 to 10 VDC.
- 16 Actuators are provided with a numbered screw terminal strip instead of a cable.
- Meets cULus requirements without the need of an electrical ground connection.

**! WARNING! LIVE ELECTRICAL COMPONENTS!**  
 During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

